

## VERTICAL CONTROL DATA SHEET O.C.S. 1995 ADJUSTMENT



## Designation: 1G-127-69

**Date Destroyed:** 

**Date Revised:** 

GPS #: 1543
OCS Index Map: Q11-01
Page/Grid: 828/C-6


City / Location: Westminster

Line #/SSN: 157/0190 Established By: OCS 1969

Monument Type: Orange County Surveyor's 3 3/4"

**Aluminum Disk** 

NAVD88 (ft)	NGVD29 (ft)	Year Leveled
31.370	28.956	2005
31.496	29.064	1992

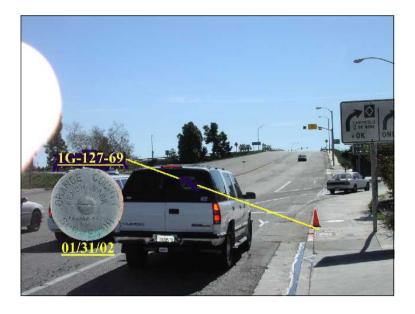

For Reconnaisance Only!		
Latitude (30' +/-)	Longitude (30' +/-)	
33 43 21.15314	117 58 19.53291	

## **Description:**

DESCRIBED BY OCS 2002 - FOUND 3 3\4" OCS ALUMINUM BENCHMARK DISK STAMPED "1G-127-69", SET IN THE NORTHEAST CORNER OF A 4 FT. BY 8 FT. CONCRETE CATCH BASIN. MONUMENT IS LOCATED IN THE SOUTHWEST CORNER OF THE INTERSECTION OF HEIL AVENUE AND MAGNOLIA STREET, 190 FT. SOUTHERLY OF THE CENTERLINE OF HEIL AVENUE AND 99 FT. NORTHERLY OF THE CENTER OF THE 405 FWY. ON RAMP. MONUMENT IS SET LEVEL WITH THE SIDEWALK.

