

Designation: 3B-49-68

Date Destroyed:

Date Revised:

GPS #:

OCS Index Map: Q20-07


Page/Grid: 972/A-6

City / Location: Dana Point

Line #/SSN: 402/0010

Established By: OCS 1968

Monument Type: Orange County Surveyor's 3 3/4"
Aluminum Disk

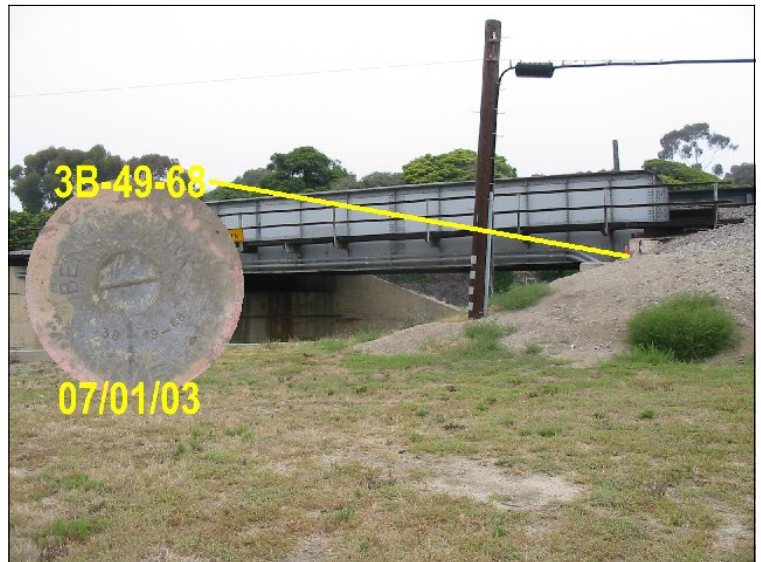

NAVD88 (ft)	NGVD29 (ft)	Year Leveled
24.071	21.778	1989

For Reconnaissance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 27 46.55	117 40 48.13

Description:

DESCRIBED BY OCS 2003 - FOUND 3 3/4" OCS ALUMINUM BENCHMARK DISK STAMPED "3B-49-68", SET IN THE SOUTHWESTERLY CORNER OF A BRIDGE FOR THE ATCHINSON/TOPEKA/SANTA FE RAILWAY. MONUMENT IS LOCATED IN THE SOUTHWESTERLY PORTION OF PACIFIC COAST HIGHWAY AND IT UNDERCROSSING OF THE ATCHINSON/TOPEKA/SANTA FE RAILWAY, 10.8 FT. SOUTHWESTERLY OF THE SOUTHWESTERLY RAIL ALONG THE TRACKS AND 8.5 FT. NORTHWESTERLY OF THE SOUTHEASTERLY END OF THE GUARD RAIL ALONG THE BRIDGE. MONUMENT IS SET 1.5 FT. BELOW THE TRACKS AND 12 FT. ABOVE THE SURFACE OF PCH.

