

Designation: 1B-85-74

Date Destroyed:

Date Revised:

GPS #:

OCS Index Map: Q05-11


Page/Grid: 797/A-5

City / Location: Los Alamitos

Line #/SSN: 152/0220

Established By: OCS 1974

Monument Type: Orange County Surveyor's 3 3/4"
Aluminum Disk

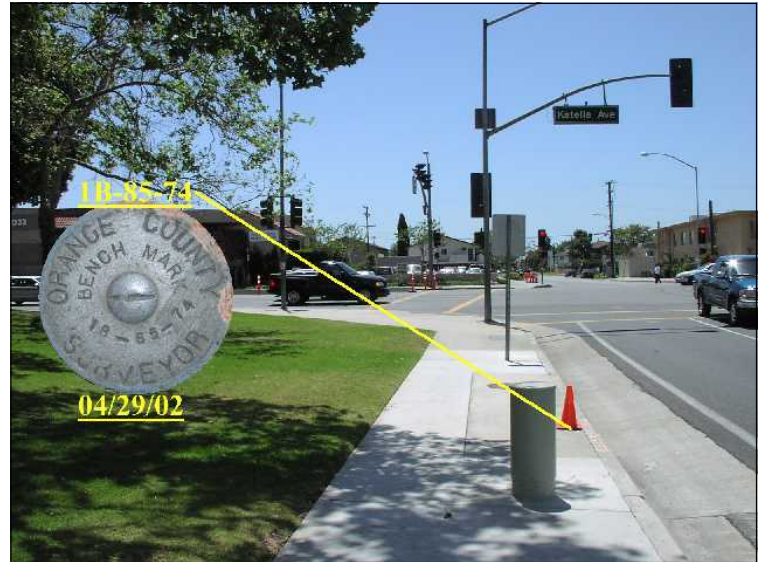

NAVD88 (ft)	NGVD29 (ft)	Year Leveled
25.321	22.902	2005
25.428	22.931	1990

For Reconnaissance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 48 12.30	118 03 47.07

Description:

DESCRIBED BY OCS 2002 - FOUND 3 3/4" OCS ALUMINUM BENCHMARK DISK STAMPED "1B-85-74", SET IN THE NORTHWEST CORNER OF A 15 FT. BY 4.5 FT. CONCRETE CATCH BASIN. MONUMENT IS LOCATED IN THE NORTHEASTERLY CORNER OF THE INTERSECTION OF BLOOMFIELD STREET AND KATELLA AVENUE, 33 FT. EASTERLY OF THE CENTERLINE OF BLOOMFIELD AND 120 FT. NORTHERLY OF THE CENTERLINE OF KATELLA. MONUMENT IS SET LEVEL WITH THE SIDEWALK.

