Vertical Control Data Sheet
O.C.S. 1995 Adjustment

Designation: 1E-78-69

Date Destroyed:
Date Revised:
GPS #: 1531
OCS Index Map: Q12-01
Page/Grid: 829/F-6
City / Location: Santa Ana

Line #/SSN: 403/0330
Established By: OCS 1969
Monument Type: Orange County Surveyor's 3 3/4" Aluminum Disk

NAVD88 (ft)	NGVD29 (ft)	Year Leveled
75.744	73.333	2010
75.943	73.500	1992

For Reconnaisance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 43 38.33398	117 52 03.21781
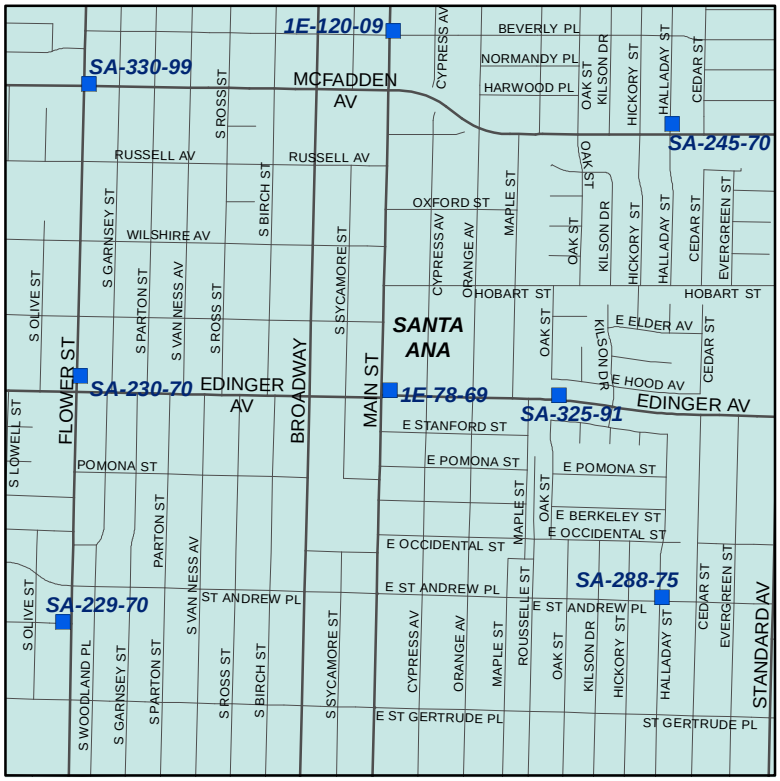
Description:
DESCRIBED BY OCS 2001 - FOUND 3 3\4" OCS ALUMINUM BENCHMARK DISK STAMPED "1E-78-69", SET IN THE SOUTHEAST CORNER OF A 3 FT. BY 12 FT. CONCRETE CATCH BASIN. MONUMENT IS LOCATED IN THE NORTHEAST CORNER OF THE INTERSECTION OF EDINGER AVENUE AND MAIN STREET, 74.5 FT. EASTERLY FROM THE CENTERLINE OF MAIN STREET AND 50 FT. NORTHERLY FROM THE CENTERLINE OF EDINGER AVENUE. MONUMENT IS SET LEVEL WITH SIDEWALK.