

### Designation: 1J-64-83

Date Destroyed:

Date Revised:

GPS #:

OCS Index Map: Q10-08


Page/Grid: 857/D-5

City / Location: Huntington Beach

Line #/SSN: 400/0970

Established By: OCS 1983

Monument Type: Orange County Surveyor's 3 3/4"  
Aluminum Disk

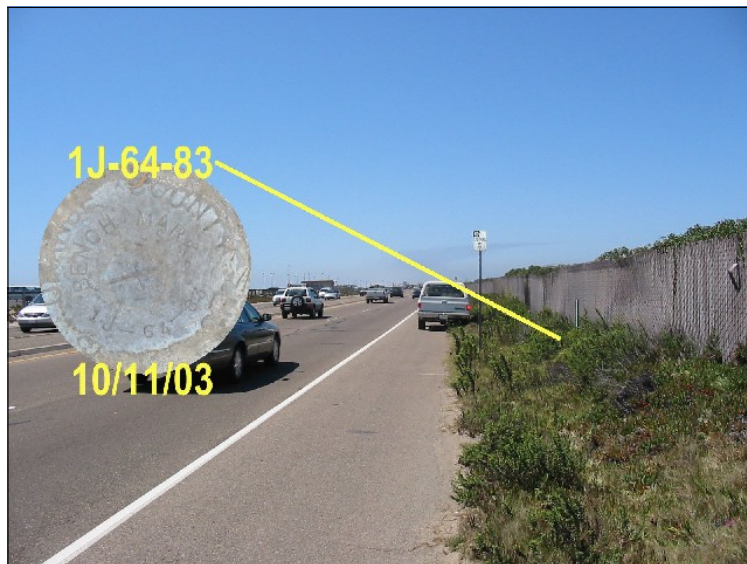

NAVD88 (ft)	NGVD29 (ft)	Year Leveled
9.423	7.006	2005
9.634	7.207	1989

For Reconnaissance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 41 11.65	118 02 18.44

#### Description:

DESCRIBED BY OCS 2003 - FOUND 3 3/4" OCS ALUMINUM BENCHMARK DISK STAMPED "1J-64-83", SET IN THE TOP OF A 6 IN. BY 6 IN. CONCRETE POST. MONUMENT IS LOCATED ALONG THE NORTHEASTERLY SIDE OF PACIFIC COAST HIGHWAY, 1.7 MILES NORTHERLY ALONG PCH FROM THE CENTERLINE OF GOLDENWEST AVENUE, 1.7 FT. SOUTHERLY OF A 6 FT. HIGH CHAINLINK FENCE AROUND AN OILFIELD, 48.4 FT. NORTHEASTERLY OF THE CENTERLINE OF PCH AND 35.3 FT. SOUTHERLY OF A GRATED CATCH BASIN UNDER CHAINLINK FENCE. MONUMENT IS SET UP 0.3 FT. ABOVE GROUND.

