

Designation: 3AA-12-70

Date Destroyed:

Date Revised:

GPS #: 0917

OCS Index Map: Q17-09


Page/Grid: 951/D-2

City / Location: Aliso Viejo

Line #/SSN: 374/0020

Established By: OCS 1970

Monument Type: Orange County Surveyor's 3 3/4"
Aluminum Disk

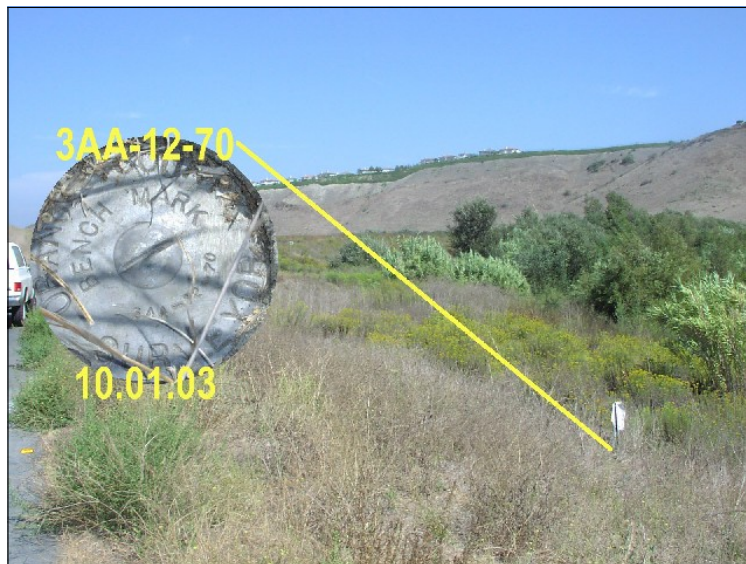

NAVD88 (ft)	NGVD29 (ft)	Year Levelled
114.235	111.901	1991

For Reconnaissance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 32 39.03132	117 43 40.63813

Description:

DESCRIBED BY OCS 2003 - FOUND 3 3/4" OCS ALUMINUM BENCHMARK DISK STAMPED "3AA-12-70", SET IN THE TOP OF A 6 IN. BY 6 IN. CONCRETE POST. MONUMENT IS LOCATED ALONG THE SOUTHEASTERLY SIDE OF THE ACCESS ROAD LEADING TO THE "SOUTH COAST COUNTY WATER DISTRICT COASTAL TREATMENT PLANT", FROM THE INTERSECTION OF ALICIA PARKWAY AND ALISO CREEK ROAD PROCEED 0.2 MILES SOUTHERLY ALONG ALICIA TO A PAVED ROAD LEADING WESTERLY, 0.9 MILES SOUTHWESTERLY ALONG SAID ROAD LEADING TO THE WATER TREATMENT PLANT, 35 FT. SOUTHEASTERLY OF ASPHALT ROAD, 12 FT. NORTHEASTERLY OF AN ANGLE POINT IN A BARBED WIRE FENCE AND 2.0 FT. SOUTHEASTERLY OF AN OCS STEEL WITNESS POST. MONUMENT IS SET 5.0 FT. BELOW THE SURFACE OF THE ROAD.

