

Designation: 3AA-14-82

Date Destroyed:

Date Revised:

GPS #:

OCS Index Map: Q17-13


Page/Grid: 951/C-6

City / Location: Laguna Beach

Line #/SSN: 374/0080

Established By: OCS 1982

Monument Type: Orange County Surveyor's 3 3/4"
Aluminum Disk

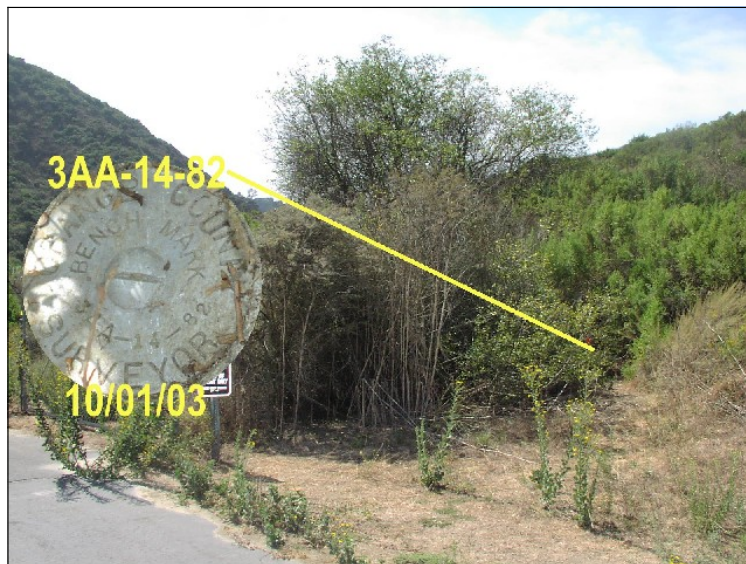

NAVD88 (ft)	NGVD29 (ft)	Year Levelled
50.188	47.853	1991

For Reconnaissance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 31 06.8	117 44 17.8

Description:

DESCRIBED BY OCS 2003 - FOUND 3 3/4" OCS ALUMINUM BENCHMARK DISK STAMPED "3AA-18-82", SET IN THE TOP OF A 6 IN. BY 6 IN. CONCRETE POST. MONUMENT IS LOCATED ALONG THE NORTHWESTERLY SIDE OF THE ACCESS ROAD LEADING TO THE "SOUTH COAST COUNTY WATER DISTRICT COASTAL TREATMENT PLANT", FROM THE INTERSECTION OF ALICIA PARKWAY AND ALISO CREEK ROAD PROCEED 0.2 MILES SOUTHERLY ALONG ALICIA TO A PAVED ROAD LEADING WESTERLY, 3.4 MILES SOUTHWESTERLY ALONG SAID ROAD LEADING TO THE WATER TREATMENT PLANT TO THE ENTRANCE GATE FOR THE WATER TREATMENT FACILITY, 38 FT. WESTERLY OF THE CENTERLINE OF THE ASPHALT ROAD, 4.0 FT. NORTHERLY OF A 4 FT. TALL BARBED WIRE FENCE AND 1.5 FT. EASTERLY OF AN OCS STEEL WITNESS POST. MONUMENT IS SET LEVEL WITH THE SURFACE OF THE ROAD.

