

## Designation: 3BB-29-79

Date Destroyed:

Date Revised: 8/17/2000

GPS #:

OCS Index Map: Q17-11


Page/Grid: 952/B-1

City / Location: Mission Viejo

Line #/SSN: 375/0130

Established By: OCS 1979

Monument Type: Orange County Surveyor's 3 3/4"  
Aluminum Disk

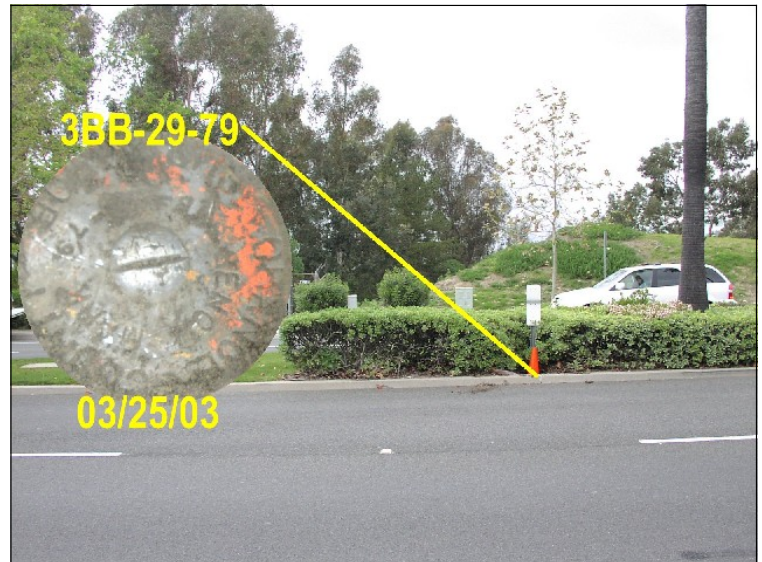

NAVD88 (ft)	NGVD29 (ft)	Year Leveled
451.690	449.355	1990

For Reconnaissance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 33 27.42	117 39 57.56

### Description:

DESCRIBED BY OCS 2003 - FOUND 3 3/4" OCS ALUMINUM BENCHMARK DISK STAMPED "3BB-29-79", SET IN THE TOP OF A 6 IN. BY 6 IN CONCRETE POST. MONUMENT IS LOCATED ALONG THE SOUTHERLY SIDE OF THE CENTERLINE MEDIAN OF MARGUERITE PARKWAY, 590 FT. WESTERLY OF MEDICAL CENTER DRIVE, 31 FT. EASTERLY OF THE CENTERLINE PROD OF AN ASPHALT ROAD LEADING THROUGH GATE TO THE NORTH AND 1.5 FT. NORTHERLY OF THE SOUTHERLY CURB ALONG MEDIAN WITH AN OCS PADDLEBOARD 1.0 NORTHERLY. MONUMENT IS SET 0.3 FT. BELOW TOP OF CURB.

