

Designation: 3L-28-71

Date Destroyed:

Date Revised: 7/2/2007

GPS #:

OCS Index Map: Q07-09


Page/Grid: 799/H-1

City / Location: Orange

Line #/SSN: 361/0020

Established By: OCS 1971

Monument Type: Orange County Surveyor's 3 3/4"
Aluminum Disk

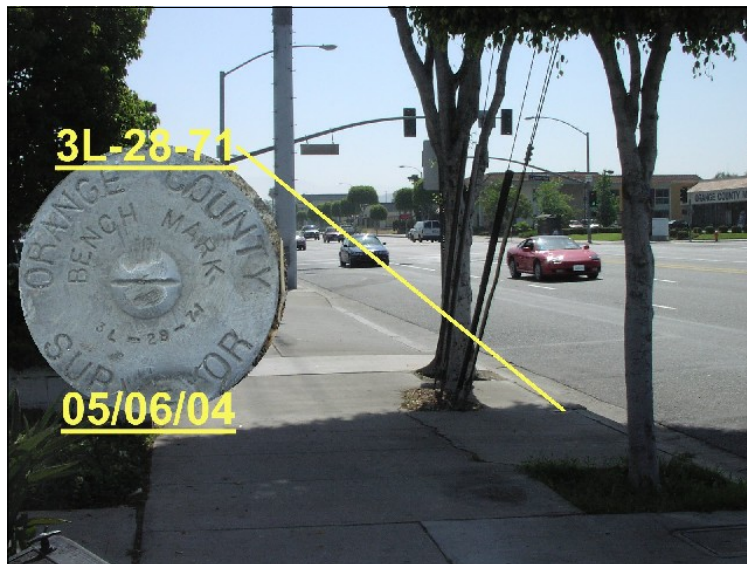

NAVD88 (ft)	NGVD29 (ft)	Year Leveled
222.494	220.074	2010
222.494	220.074	1992

For Reconnaissance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 48 33.36	117 50 42.37

Description:

DESCRIBED BY OCS 2004 - FOUND 3 3/4" OCS ALUMINUM BENCHMARK DISK STAMPED "3L-28-71", SET IN THE TOP OF A 6 IN. BY 6 IN. CONCRETE POST. MONUMENT IS LOCATED IN THE NORTHWESTERLY CORNER OF THE INTERSECTION OF KATELLA AVENUE AND CAMBRIDGE STREET, 174 FT. WESTERLY OF THE WESTERLY CURB FACE ALONG CAMBRIDGE AND 48.5 FT. NORTHERLY OF THE CENTERLINE OF KATELLA. MONUMENT IS SET LEVEL WITH THE SIDEWALK.

