

Designation: CMM-H14-74

Date Destroyed:

Date Revised:

GPS #:

OCS Index Map: Q10-07


Page/Grid: 857/D-1

City / Location: Huntington Beach

Line #/SSN: 624/0020

Established By: OCS 1974

Monument Type: Orange County Surveyor's 3 3/4"
Aluminum Disk

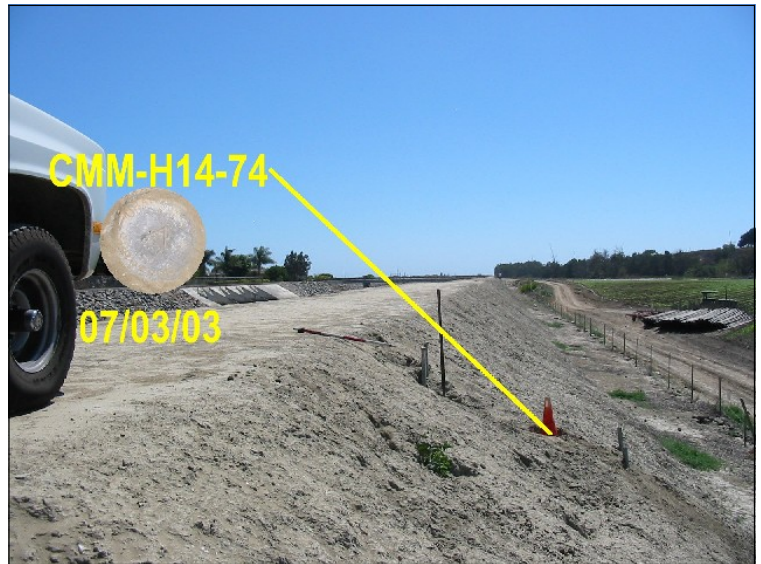

NAVD88 (ft)	NGVD29 (ft)	Year Leveled
9.428	7.011	2005
9.576	7.141	1992

For Reconnaissance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 42 34.1	118 02 09.1

Description:

DESCRIBED BY OCS 2003 - FOUND 3 3/4" OCS ALUMINUM BENCHMARK DISK STAMPED "CMM-H14-74", SET IN THE TOP OF A 20 IN. DIAMETER CONCRETE POST. MONUMENT IS LOCATED ALONG THE NORTHERLY LEVEE OF THE GARDEN GROVE WINTERSBURG CHANNEL, 0.2 MILES WESTERLY ALONG THE LEVEE ROAD FROM THE CENTERLINE OF GRAHAM STREET, 17 FT. SOUTHERLY OF A 4 FT. BARBED WIRE RIGHT OF WAY FENCE FOR AN AGRICULTURAL FIELD AND 4.4 FT. NORTHERLY OF THE MOST SOUTHERLY 2 OF 4 STEEL WITNESS POSTS. MONUMENT IS SET 2.5 FT. BELOW LEVEE ROAD.

