

Designation: F-785

Date Destroyed:

Date Revised:

GPS #:

OCS Index Map: Q20-03


Page/Grid: 972/C-3

City / Location: San Juan Capistrano

Line #/SSN: 402/0070

Established By: USC & GS 1946

Monument Type: Bronze / Brass Disk

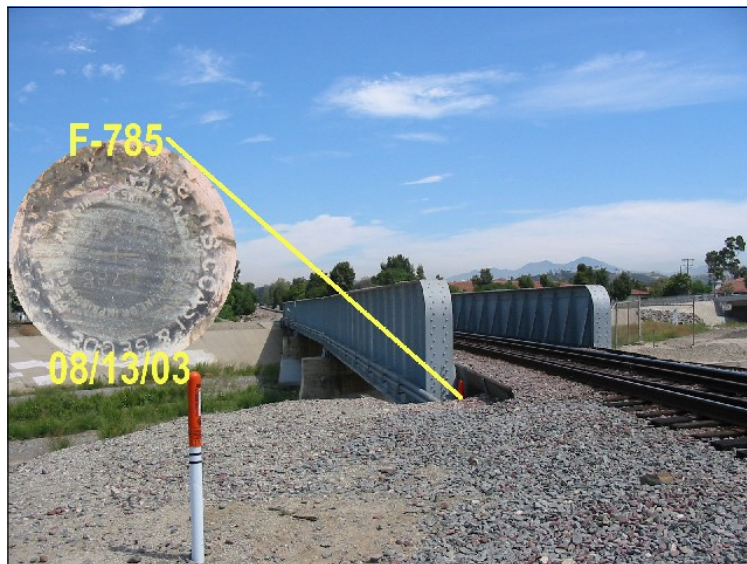

NAVD88 (ft)	NGVD29 (ft)	Year Leveled
75.717	73.413	1991

For Reconnaissance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 29 27.05	117 39 51.49

Description:

DESCRIBED BY OCS 2003 - FOUND 3 3/4" US COAST AND GEODETIC SURVEY BRONZED DISK STAMPED "F 785 1946", SET IN THE TOP OF A CONCRETE BRIDGE ABUTMENT. MONUMENT IS LOCATED IN THE SOUTHWESTERLY CORNER OF THE ATCHINSON/TOPEKA AND SANTA FE RAILWAY OVERCROSSING OF SAN MATEO CREEK, 69 FT. NORTHERLY ALONG THE RAILWAY FROM THE CENTERLINE OF THE INTERSTATE 5 FREEWAY SOUTHBOUND ONRAMP AT CAMINO CAPISTRANO PROLONGED TO THE WEST AND 150 +/- WESTERLY FROM THE CENTERLINE OF CAMINO CAPISTRANO. MONUMENT IS SET 2.0 FT. BELOW THE TRACKS.

