

## VERTICAL CONTROL DATA SHEET O.C.S. 1995 ADJUSTMENT



## **Designation: IRV-B-BM1**

**Date Destroyed:** 

Date Revised: 8/8/2008

GPS #:


OCS Index Map: Q12-03 Page/Grid: 830/E-4 City / Location: Redhill

Line #/SSN: 355/0310 Established By: OCS 1984

Monument Type: Orange County Surveyor's 3 3/4"

**Aluminum Disk** 

NAVD88 (ft)	NGVD29 (ft)	Year Leveled
121.513	119.091	1991

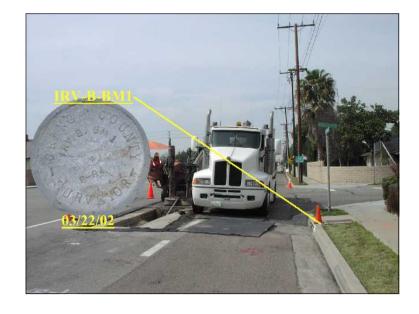

For Reconnaisance Only!		
Latitude (30' +/-)	Longitude (30' +/-)	
33 44 20.81	117 47 45.82	

## **Description:**

DESCRIBED BY OCS 2002 - FOUND 3 3\4" OCS ALUMINUM BENCHMARK DISK STAMPED "IRV-B-BM1 8-84", SET IN THE SOUTHEASTERLY CORNER OF A 4 FT. BY 5 FT. CONCRETE CATCH BASIN. MONUMENT IS LOCATED IN THE EASTERLY CORNER OF THE INTERSECTION OF IRVINE BOULEVARD AND RANCHWOOD ROAD, 38 FT. NORTHEASTERLY OF THE CENTERLINE OF IRVINE BOULEVARD AND 38 FT. SOUTHEASTERLY OF THE CENTERLINE OF RANCHWOOD ROAD. MONUMENT IS SET LEVEL WITH THE SIDEWALK.

