

Designation: J-350

Date Destroyed:

Date Revised:

GPS #:

OCS Index Map: Q02-08


Page/Grid: 709/D-4

City / Location: Unin., Orange Co.

Line #/SSN: 401/0610

Established By: USC & GS 1949

Monument Type: Bronze / Brass Disk

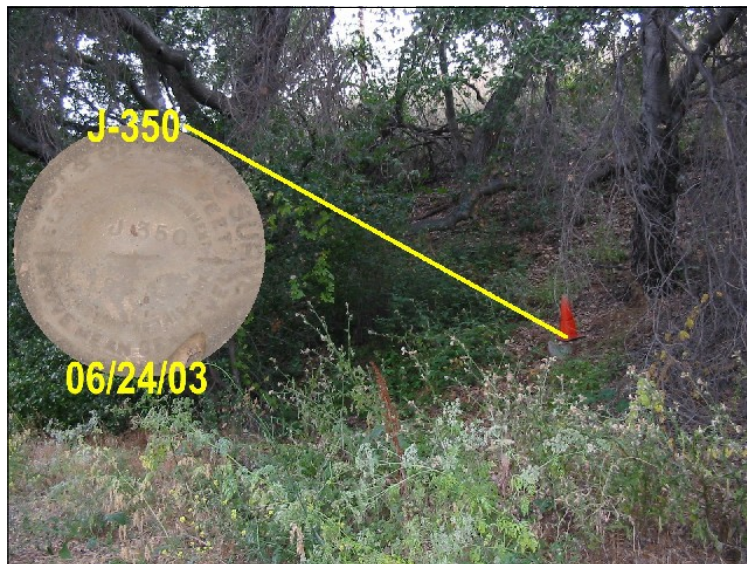

NAVD88 (ft)	NGVD29 (ft)	Year Leveled
449.481	447.064	2005
449.642	447.226	1995

For Reconnaissance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 56 24.4	117 52 49.7

Description:

DESCRIBED BY OCS 2003 - FOUND 3 3/4" USCGS BRONZED DISK STAMPED "J 350 1949", SET IN THE TOP OF A 1 FT. BY 1 FT. CONCRETE POST. MONUMENT IS LOCATED ALONG THE EASTERLY SIDE OF BREA BOULEVARD, 1.15 MILES NORTHEASTERLY ALONG BREA FROM THE CENTERLINE OF STATE COLLEGE BOULEVARD TO A PAVED ROAD THAT HEADS EASTERLY, 460 FT. EASTERLY ALONG SAID ROAD, 25 FT. NORTHERLY OF THE CENTERLINE OF THE ROAD AND 27 FT. EASTERLY OF A 36 IN. OAK TREE. MONUMENT IS SET 3 FT. ABOVE THE LEVEL OF THE ROAD.

