


Monument Type: Bronze / Brass Disk



NAVD88 (ft)	NGVD29 (ft)	Year Leveled
391.635	389.217	2005
391.735	389.319	1990

For Reconnaissance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 55 29.93	117 53 45.56

DESCRIBED BY OCS 2003 - FOUND NATIONAL
GEODETIC SURVEY BRASS DISK STAMPED "V 424
RESET 1979" SET IN THE TOP OF A CONCRETE
CURB RETURN. MONUMENT IS LOCATED IN THE
NORTHWESTERLY CORNER OF THE INTERSECTION
OF BREA BOULEVARD AND LAMBERT ROAD, 10 FT.
EASTERLY OF THE ECR, 60 FT. WESTERLY OF THE
CENTERLINE OF BREA BLVD AND 40 FT.
NORTHERLY OF THE CENTERLINE OF LAMBERT
ROAD. MONUMENT IS SET LEVEL WITH THE
SIDEWALK.

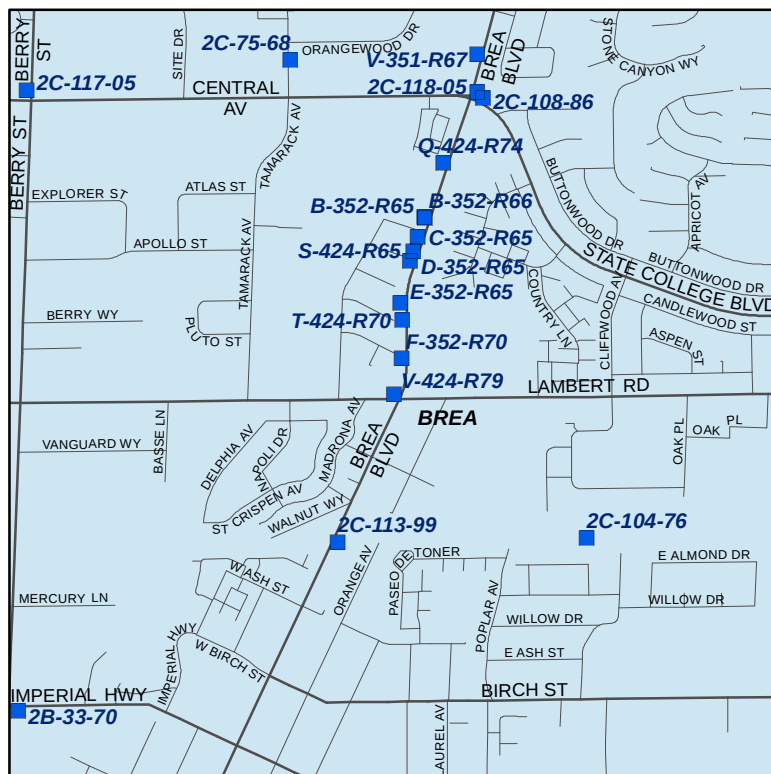

BENCHMARKS MAY HAVE MORE THAN ONE HEIGHT DUE TO THE DATUM, ADJUSTMENTS, AND YEAR LEVELLED. TO AVOID CONFUSION, ALWAYS STATE THESE AS REFERENCES WHEN USING BENCHMARK ELEVATION VALUES.