

**TRACT MAP**

Recording Requested By:

**JAN A. ADAMS**

When Recorded Mail to:

**ADAMS - STREETER, CIVIL ENGINEERING  
15 CORPORATE PARK  
IRVINE, CALIFORNIA, 92606**

Recorded in Official Records, Orange County  
Tom Daly, Clerk-Recorder

9.00

2005000203980 11:15am 03/18/05

100 48 C18 2

0.00 0.00 0.00 0.00 3.00 0.00 0.00 0.00

Space Above This Line for Recorder's Use

**TRACT MAP  
Certificate of Correction**

**UNINCORPORATED TERRITORY OF THE  
COUNTY OF ORANGE  
STATE OF CALIFORNIA**

The following corrections are hereby made to Tract No. 16245, filed in Book 835, Pages 7 through 11, inclusive, of Miscellaneous Maps, in the Office of the County Recorder of Orange County:

**SHEET 2- MONUMENT NOTES**

**CHANGE NOTE NUMBER 8 WHICH READS;**

8" SPIKE AND WASHER STAMPED "RCE 21687" OR LEAD, TACK AND TAG STAMPED "R.C.E. 21687" OR 1" IRON PIPE, TAGGED "RCE 21687" TO BE SET AT ALL CENTERLINE INTERSECTIONS, B.C.'S, E.C.'S AND ALL OTHER CENTERLINE POINTS OF CONTROL, UNLESS OTHERWISE NOTED.

**TO READ;**


8" SPIKE AND WASHER STAMPED "RCE 21687" IN ASPHALT PAVING OR LEAD, TACK AND TAG "R.C.E. 21687" IN CONCRETE OR 1" IRON PIPE, TAGGED "RCE 21687" TO BE SET AT ALL CENTERLINE INTERSECTIONS, B.C.'S, E.C.'S AND ALL OTHER CENTERLINE POINTS OF CONTROL, UNLESS OTHERWISE NOTED. EXCEPT AT THE FOLLOWING LOCATIONS:


AT THE SOUTHWESTERLY TERMINUS OF THAT CERTAIN COURSE SHOWN AS N 63° 34' 51" E 110.89 FEET, ON THE CENTERLINE OF LA SALLE LANE. SET 1" IP TAGGED "R.C.E. 21687" ON A 8.00 FOOT OFFSET ALONG A BEARING OF N 26° 25' 09" W.

### ENGINEER'S CERTIFICATE

I HEREBY CERTIFY THAT THIS CERTIFICATE OF CORRECTION WAS PREPARED BY ME OR UNDER MY DIRECTION ON MARCH 14, 2005 AND THE CHANGES SHOWN HEREON ARE AS PROVIDED FOR IN SECTION 66469 OF THE SUBDIVISION MAP ACT.

SIGNED

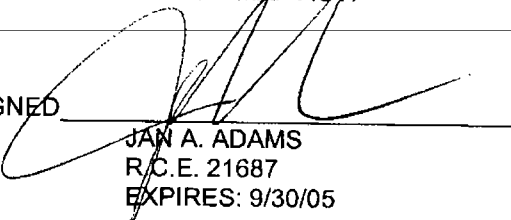  
JAN A. ADAMS  
R.C.E. 21687  
EXPIRES: 9/30/05



### COUNTY SURVEYOR'S CERTIFICATE

I HEREBY CERTIFY THAT I HAVE EXAMINED THIS CERTIFICATE OF CORRECTION AND THE ONLY CHANGES MADE ARE THOSE SET FORTH IN SECTION 66469 OF THE SUBDIVISION MAP ACT.

DATED THIS 17<sup>th</sup> DAY OF March, 2005

RAYMOND L. MATHE  
COUNTY SURVEYOR

BY:   
COUNTY SURVEYOR



LISTED BELOW ARE THE PRESENT FEE OWNERS OF REAL PROPERTY AFFECTED BY THIS CORRECTION OR ADDITION.

"PUBLIC STREETS"