

GPS #: 0166

Date Destroyed:

Date Revised:

Benchmark Designation:

OCS Index Map: 4LA

Page/Grid: 828/A-3

City / Location: Midway City


Scale Factor: 0.99998045

Ellipsoid Red. Factor: 1.00000350

Combination Factor: 0.99998399

Convergence Angle: -00 57 12.91898

Factors and Convergence Angle based on the 1991.35 Epoch Adjustment positions.

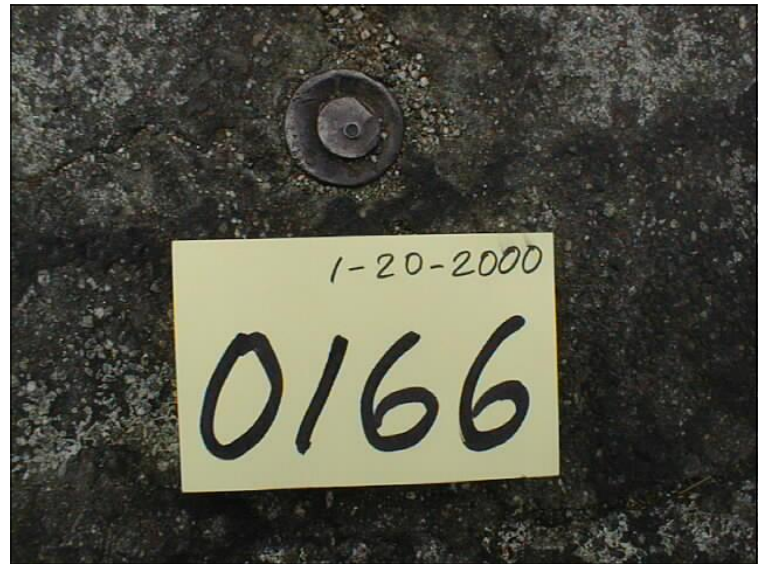

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 45 00.72770	117 59 07.15047	2220990.264	6034192.955	-72.634
2007.00	33 45 00.74394	117 59 07.16732	2220991.93	6034191.56	

References: A/5-11&12, 579

Description:

FD PUNCHED CUT-SPIKE WITH BRASS TAG,
STAMPED LS 3047, FLUSH IN ASPHALT, PER A/5-11 &
12, 579. LOCATED AT THE INTER OF ROOSEVELT
AVE. AND MONROE ST.

