

GPS #: **0310**

Date Destroyed:

Date Revised:

Benchmark Designation:

OCS Index Map: 6LA

Page/Grid: 951/D-6

City / Location: Laguna Niguel


Scale Factor: 0.99995909

Ellipsoid Red. Factor: 0.99996287

Combination Factor: 0.99992196

Convergence Angle: -00 48 48.38411

Factors and Convergence Angle based on the 1991.35 Epoch Adjustment positions.

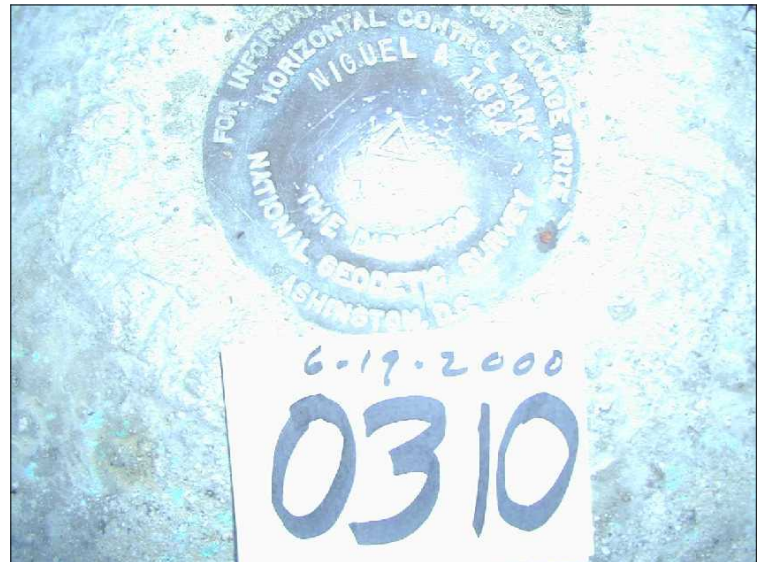

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 30 52.30484	117 43 49.00900	2134045.696	6110492.440	775.927
2007.00	33 30 52.32170	117 43 49.02512	2134047.42	6110491.10	

References: RSB 143/30-35, RSB 150/36-50

Description:

FD 3 1/2" N.G.S. BRASS DISK STAMPED "NIGUEL A 1884 1981" SET IN A 12" DIA. CONC. COLLAR, FLUSH WITH GROUND, LOCATED ON NORTH EDGE OF GRASS AREA IN SEA VIEW PARK, OVERLOOKING ALISO CANYON, OFF OF TALAVERA DR.

