

GPS #: **0489R1**

Date Destroyed:

Date Revised: 1/23/2004

Benchmark Designation:

OCS Index Map: 1L

Page/Grid: 739/D-1

City / Location: Brea


Scale Factor: 1.00000471

Ellipsoid Red. Factor: 0.99999023

Combination Factor: 0.99999493

Convergence Angle: -00 53 44.73908

Factors and Convergence Angle based on the 1991.35 Epoch Adjustment positions.

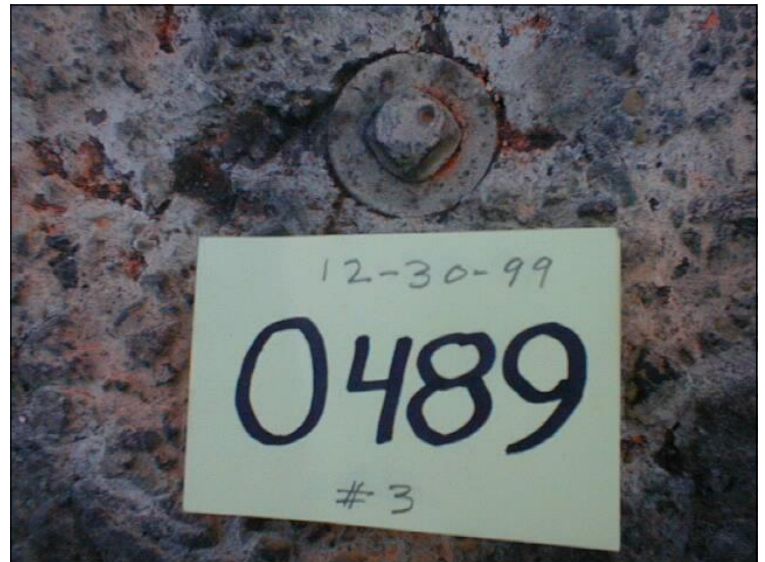

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 54 38.81837	117 52 48.30926	2278903.011	6067091.005	
2007.00	33 54 38.83506	117 52 48.32636	2278904.72	6067089.59	

References: MM 229/13-17, RSB 149/1-9, CR 2002-1084, CR 2003-1039, CR2011-1840

Description:

FD 2 1/2" BRASS CAP STAMPED "CALIF. DEPT. OF TRANSPORTATION" DOWN 0.6' IN WELL. MONUMENT WAS RESET PER CORNER RECORD #2003-1039 IN LIEU OF PUNCHED BOAT SPIKE AND WASHER, NO STAMPING, FLUSH WITH A.C. SURFACE, AT THE CENTERLINE INTER OF IMPERIAL HWY. AND ASSOCIATED RD.

