

GPS #: **1038**

Date Destroyed:

Date Revised:

Benchmark Designation:

OCS Index Map: 3L

Page/Grid: 708/A-4

City / Location: Whittier, Los Angeles Co.


Scale Factor: 1.00001010

Ellipsoid Red. Factor: 0.99999123

Combination Factor: 1.00000130

Convergence Angle: -00 57 10.77568

Factors and Convergence Angle based on the 1991.35 Epoch Adjustment positions.

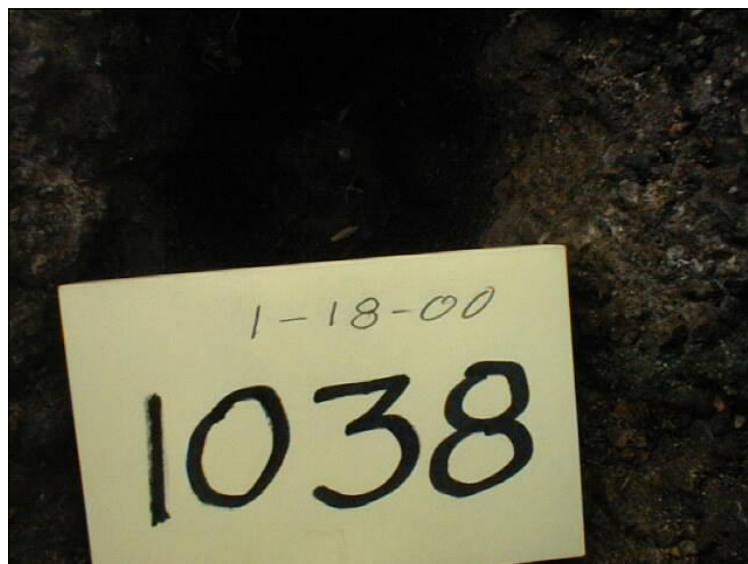

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 56 27.17946	117 59 03.25013	2290365.291	6035676.350	184.616
2007.00	33 56 27.19563	117 59 03.26755	2290366.95	6035674.91	

References: RS 92-1117

Description:

FD LEAD AND TACK DOWN 0.3' IN CONC. RD.WAY
LOCATED AT THE APPARENT CENTERLINE INTER
OF WHITTIER BLVD. AND BOGARDUS AVE.

