

## HORIZONTAL CONTROL DATA SHEET CCS83, ZONE VI



GPS #: 1501

**Date Destroyed:** 11/20/2006

Date Revised: 4/23/1996

Benchmark Designation: 3NN-6-80


OCS Index Map: 6LB
Page/Grid: 953/G-1

Page/Grid: 953/G-1

City / Location: Unin., Orange County

Scale Factor: 0.99996114
Ellipsoid Red. Factor: 0.99998419
Combination Factor: 0.99994533
Convergence Angle: -00 42 49.21793

Factors and Convergance Angle based on the 1991.35 Epoch Adjustment positions.

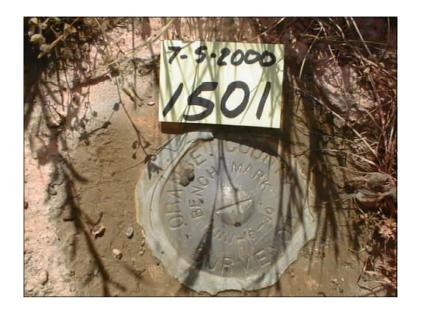

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 32 55.17837	117 32 55.40629	2145726.920	6165980.571	330.327
2007.00	33 32 55.19522	117 32 55.42203	2145728.64	6165979.26	

References: OCS FILE # OC96/7-5, GEODETIC UNIT

## **Description:**

REPORTED DESTROYED (SEE DATE IN DESTROYED BOX) - ORIGINAL DESCRIPTION BEING: FD 3 3/4" OCS ALUMINUM DISK STAMPED "3NN-6-80". LOCATED 14.4' SOUTH OF THE CENTER STRIPE OF ORTEGA HWY. (RTE 74), 8.65 MILES EAST OF SAN DIEGO FREEWAY (I-5), 0.65 MILE SW OF LUCAS CANYON RD., 4 MILES SW OF THE SAN JUAN FIRE STATION, ON SOUTH CORNER OF 3.5' X 3.5' INLET, HAVING A PADDLE BOARD READING "ORA 74 PM 8.65" SET AT THE SW'LY WALL, 0.5' FROM THE S'LY END OF WALL, 65' S'LY FROM A CENTERLINE POINT MARKED "SECTION LINE".

