

Horizontal Control Data Sheet CCS83, ZONE VI



GPS #: 2632

Date Destroyed:

Date Revised: 6/8/1999

Benchmark Designation:

OCS Index Map: 6LB Page/Grid: 922/F-4

City / Location: Unin., Orange County

Scale Factor: 0.99996341


Ellipsoid Red. Factor: 0.99997686

Combination Factor: 0.99994028

Convergence Angle: -00 45 32.48058

Factors and Convergance Angle based on

the 1991.35 Epoch Adjustment positions.

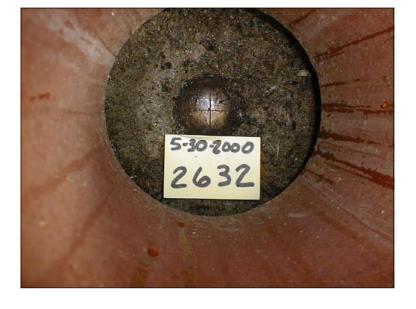

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 34 51.86525	117 37 52.50808	2157843.428	6140994.104	483.513
2007.00	33 34 51.88211	117 37 52.52399	2157845.15	6140992.78	

References: OCS SURVEY FILE # 989GL9179

Description:

DESCRIBED BY OCS 6/2/99 - FOUND 2" BRASS OCS DISK STAMPED DOWN 1.7' IN O.C.S. WELL MONUMENT, STATION IS LOCATED AT THE CENTERLINE INTERSECTION OF ANTONIO PARKWAY AND DEERPATH.

