

GPS #: **3081R1**

Date Destroyed:

Date Revised: 10/16/2013

Benchmark Designation:

OCS Index Map: 2L

Page/Grid: 799/A-1

City / Location: Anaheim


Scale Factor: 0.99998865

Ellipsoid Red. Factor: 0.99999844

Combination Factor: 0.99998709

Convergence Angle: -00 54 36.13063

Factors and Convergence Angle based on the 1991.35 Epoch Adjustment positions.

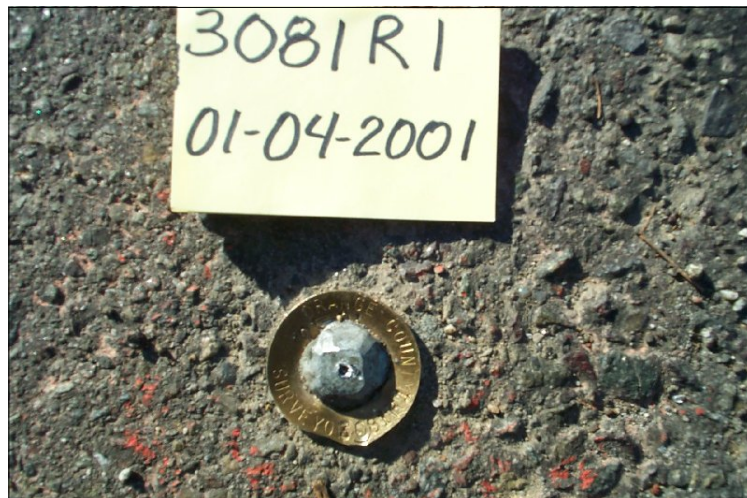

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 48 38.15511	117 54 21.83049	2242573.940	6058630.740	
2007.00	33 48 38.17132	117 54 21.84774	2242575.60	6058629.31	

References: RSB 149/10-20, CR 2001-0352, CR 2013-2402

Description:

FD PUNCHED SPIKE AND BRASS OCS WASHER STAMPED "3081R1 01-01" IN LIEU OF CONC. NAIL AND 3/4" BRASS TAG. MONUMENT HAS BEEN RESET PER CORNER RECORD # 2001-0352. STATION IS LOCATED AT APPARENT CENTERLINE INTER OF CERRITOS AVE. AND ANAHEIM BLVD.

