

HORIZONTAL CONTROL DATA SHEET CCS83, ZONE VI



GPS #: 3179

Date Destroyed:

Date Revised:

Benchmark Designation:

OCS Index Map: 5LB
Page/Grid: 800/F-6

City / Location: Unin., Orange County

Scale Factor: 0.99998335


Ellipsoid Red. Factor: 0.99998108

Combination Factor: 0.99996444

Convergence Angle: -00 50 37.59110

Factors and Convergance Angle based on

the 1991.35 Epoch Adjustment positions.

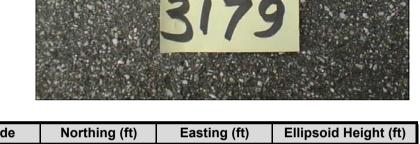

	Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
	1991.35	33 46 21.03229	117 47 07.74151	2228154.025	6095050.602	395.360
L	2007.00	33 46 21.04838	117 47 07.75755	2228155.67	6095049.27	

References: MM 347/37-41, RSB 150/24-35

Description:

FD PUNCHED SPIKE AND WASHER, STAMPED "LS 2977", FLUSH. STATION IS LOCATED AT END OF CENTERLINE, IN THE CUL-DE-SAC OF CAMDEN DR. LOCATED 22.00' SW'LY FROM THE RADIUS POINT.

