


GPS #: **3233R1**

Date Destroyed:
Date Revised: 10/17/2013
Benchmark Designation:
OCS Index Map: 2L
Page/Grid: 800/H-4
City / Location: Orange

Scale Factor: 0.99998543
Ellipsoid Red. Factor: 0.99997885
Combination Factor: 0.99996427
Convergence Angle: -00 50 08.13820

Factors and Convergence Angle based on the 1991.35 Epoch Adjustment positions.

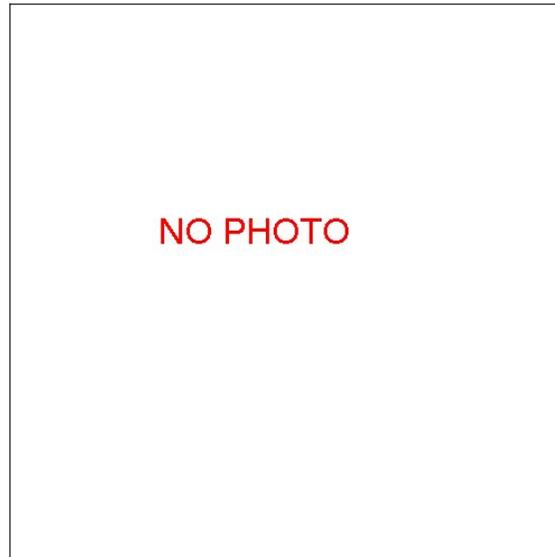

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 47 16.05000	117 46 14.14375	2233648.489	6099655.757	
2007.00	33 47 16.06615	117 46 14.16010	2233650.14	6099654.40	

References: RSB 149/10-20, CR 2003-677

Description:

FD P/K NAIL WITH TAG STAMPED "LS 5411" FLUSH PER CR 2003-677 IN LIEU OF PUNCHED SPIKE AND WASHER, STAMPED "LS 3236", FLUSH. STATION IS LOCATED AT APPARENT CENTERLINE INTER OF CANYON VIEW AVE. AND NEWPORT BLVD.

NO
LOCATION
MAP