


**GPS #:** 4208R1

**Date Destroyed:** 1/28/2013  
**Date Revised:** 5/3/2004  
**Benchmark Designation:**  
**OCS Index Map:** 4LA  
**Page/Grid:** 828/D-2  
**City / Location:** Westminster

**Scale Factor:** 0.99998071  
**Ellipsoid Red. Factor:** 1.00000280  
**Combination Factor:** 0.99998351  
**Convergence Angle:** -00 56 29.96627

*Factors and Convergence Angle based on the 1991.35 Epoch Adjustment positions.*

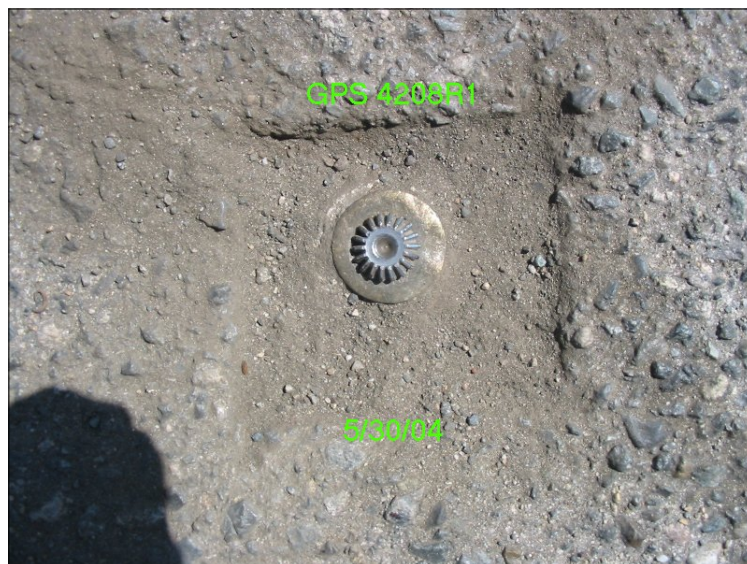

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 45 07.81122	117 57 48.98609	2221597.033	6040803.880	
2007.00	33 45 07.82739	117 57 49.00285	2221598.69	6040802.49	

**References:** MM 183/30-31, RSB 149/37-43, CR 0821, PM 2013-107

**Description:**

DESTROYED PER PM 2013-107 (SEE DATE IN DESTROYED): FD GIN SPIKE AND BRASS TAG, DN. 0.05' IN LIEU OF PUNCHED SPIKE AND WASHER (NO MARKINGS), FLUSH IN A.C., WITH FOUR 3' TANGENT OVER PUNCHED SPIKE SURFACE TIES. MONUMENT HAS BEEN RESET PER CORNER RECORD 0821. STATION IS LOCATED AT CENTERLINE INTER OF BUSHARD ST. AND HAZARD AVE.

NO  
LOCATION  
MAP