

Horizontal Control Data Sheet CCS83, ZONE VI



GPS #: 6075

Date Destroyed:

Date Revised:

Benchmark Designation:

OCS Index Map: 5LA
Page/Grid: 829/G-6
City / Location: Santa Ana


 Scale Factor:
 0.99997705

 Ellipsoid Red. Factor:
 1.00000210

 Combination Factor:
 0.99997915

 Convergence Angle:
 -00 52 58.06883

Factors and Convergance Angle based on the 1991.35 Epoch Adjustment positions.

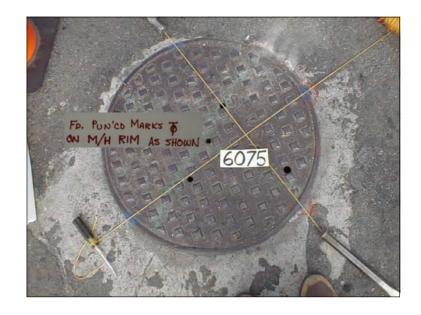

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 43 20.42765	117 51 23.37977	2210225.425	6073191.676	-43.901
2007.00	33 43 20.44398	117 51 23.39661	2210227.10	6073190.28	

References: PMB 179/16-17, RSB 150/10-23

Description:

FD FOUR PUNCHES BEING TANGENT OVER, ON SEWER MANHOLE RIM. STATION IS LOCATED 0.16' EAST FROM THE CENTERLINE INTER OF ST. ANDREW PLACE AND STANDARD AVE.

