OC Public Works
OC Survey

Horizontal Control Data Sheet
CCS83, ZONE VI

GPS #: 6083R1

Date Destroyed:

Date Revised: 12/12/2010

Benchmark Designation:

OCS Index Map: 5LA

Page/Grid: 829/C-7

City / Location: Santa Ana

Scale Factor: 0.99997625

Ellipsoid Red. Factor: 1.00000332

Combination Factor: 0.99997957

Convergence Angle: -00 54 16.36398

Factors and Convergance Angle based on the 1991.35 Epoch Adjustment positions.

No Photo

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 42 55.78601	117 53 45.85954	2207922.631	6061119.236	-69.390
2007.00	33 42 55.80251	117 53 45.87651	2207924.32	6061117.83	

References: A/5-10 238, RSB 150/10-23, CR 2008-0530

Description:
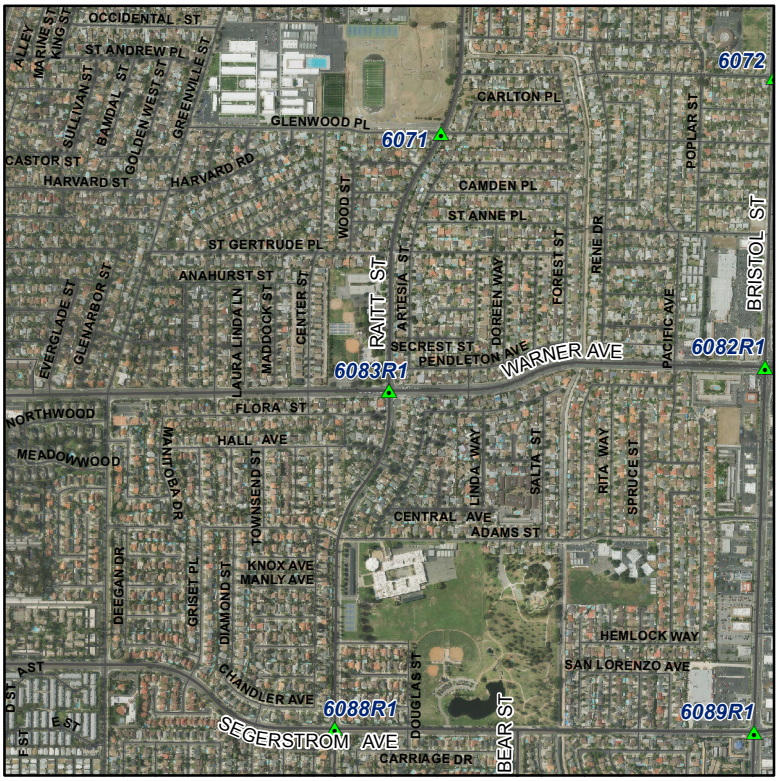
FD 3"BRASS DISK IN WELL MONUMENT PER CR 2008-0530 IN LIEU OF PUNCHED ROUND HEAD SPIKE, NO TAG, DOWN 0.2' IN A.C. STATION IS LOCATED AT CENTERLINE INTER OF WARNER AVE. AND RAITT ST.