

GPS #: 6684R1

Date Destroyed:

Date Revised: 11/20/2000

Benchmark Designation:

OCS Index Map: 5LB

Page/Grid: 891/J-2

City / Location: Lake Forest


Scale Factor: 0.99996888

Ellipsoid Red. Factor: 0.99998272

Combination Factor: 0.99995159

Convergence Angle: -00 47 26.78570

Factors and Convergence Angle based on the 1991.35 Epoch Adjustment positions.

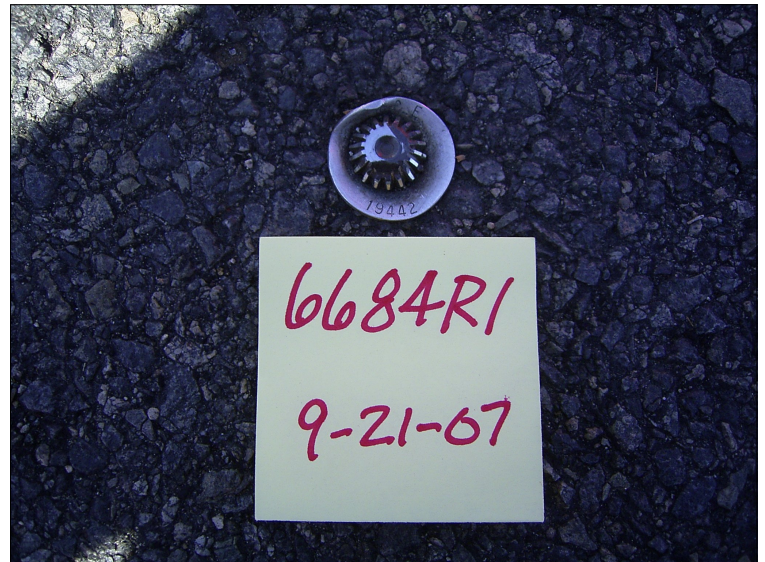

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 38 43.69210	117 41 20.51802	2181511.910	6123721.024	
2007.00	33 38 43.70895	117 41 20.53396	2181513.63	6123719.70	

References: A/6-8 2845, RSB 150/24-35, CR 2000-0488

Description:

FD PUNCHED SPIKE AND WASHER STAMPED "RCE 19442" IN LIEU OF PUNCHED SPIKE AND WASHER, STAMPED "RCE 13866" (ILLEGIBLE), DOWN 0.07'. STATION IS LOCATED AT CENTERLINE INTER OF LAKE FOREST DR. AND SERRANO RD.

