

GPS #: 7585

Date Destroyed:

Date Revised:

Benchmark Designation:

OCS Index Map: 6LA

Page/Grid: 951/H-5

City / Location: Laguna Niguel


Scale Factor: 0.99995961

Ellipsoid Red. Factor: 0.99997940

Combination Factor: 0.99993901

Convergence Angle: -00 47 39.29089

Factors and Convergence Angle based on the 1991.35 Epoch Adjustment positions.

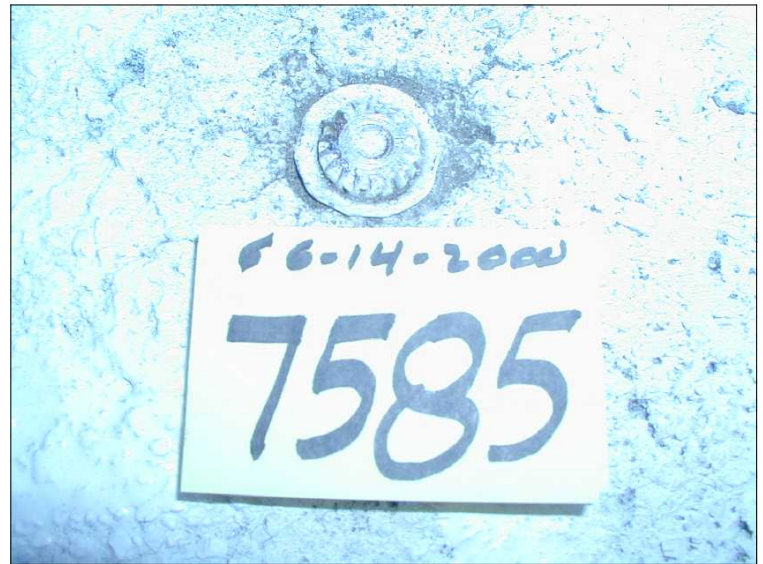

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 31 25.44716	117 41 43.27471	2137245.929	6121183.332	430.573
2007.00	33 31 25.46420	117 41 43.29071	2137247.67	6121182.00	

References: MM 581/26-29, RSB 150/36-50

Description:

FD GEAR SPIKE AND WASHER, STAMPED "RCE 23956", FLUSH IN A.C., STATION IS LOCATED AT THE RADIUS POINT OF SIROS CUL-DE-SAC, 20.00' SE'LY FROM THE END OF CENTERLINE.

