

GPS #: 7637

Date Destroyed:

Date Revised:

Benchmark Designation:

OCS Index Map: 6LA

Page/Grid: 922/B-4

City / Location: Mission Viejo


Scale Factor: 0.99996344

Ellipsoid Red. Factor: 0.99998642

Combination Factor: 0.99994985

Convergence Angle: -00 46 47.72483

Factors and Convergence Angle based on the 1991.35 Epoch Adjustment positions.

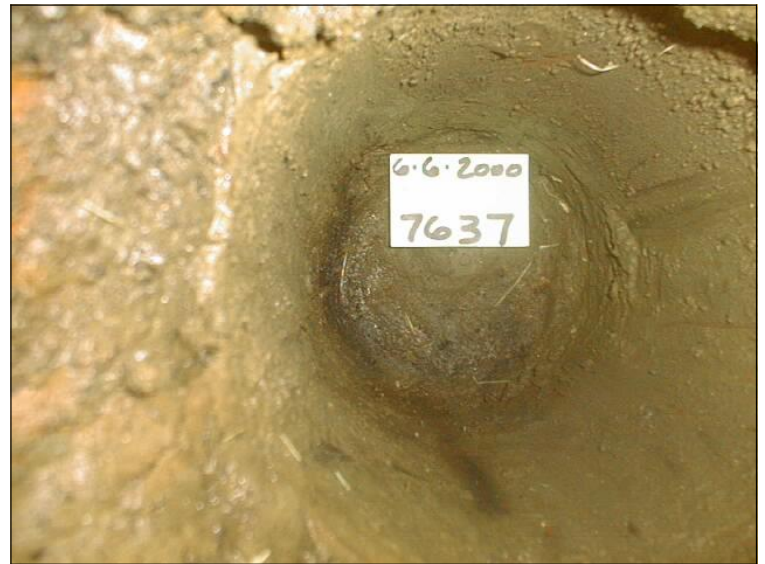

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 34 53.07140	117 40 09.43590	2158120.904	6129412.420	283.864
2007.00	33 34 53.08830	117 40 09.45201	2158122.63	6129411.08	

References: MM 341/37-46, RSB 150/36-50

Description:

FD TACK AND TAG IN CONC., STAMPED "LS 3109", DOWN 1.47' IN WELL MONUMENT. STATION IS LOCATED AT CENTERLINE INTER OF VIA OCEANO AND VIA MARINA.

