

GPS #: **P272**

Date Destroyed:

Date Revised:

Benchmark Designation:

OCS Index Map: 5LA

Page/Grid: 889/D-2

City / Location: Newport Beach


Scale Factor: 0.99996957

Ellipsoid Red. Factor: 1.00000450

Combination Factor: 0.99997414

Convergence Angle: -00 53 51.64369

Factors and Convergence Angle based on the 1991.35 Epoch Adjustment positions.

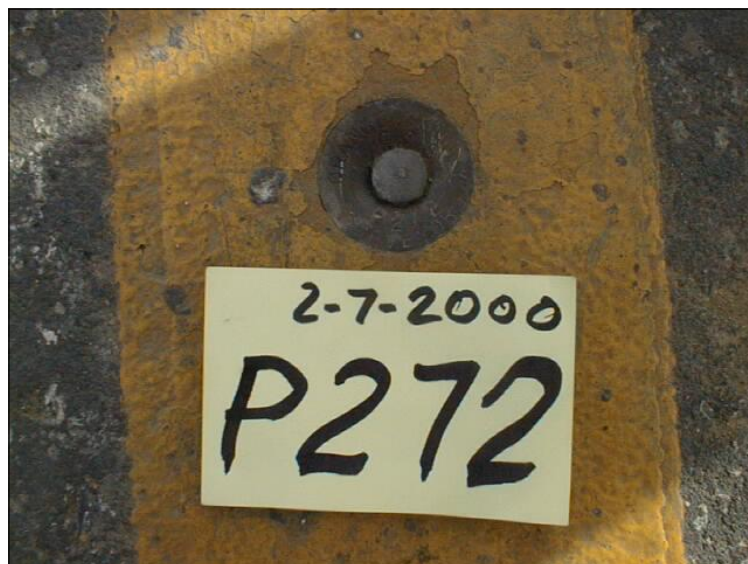

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 39 10.09462	117 53 00.87412	2185052.701	6064561.361	-93.697
2007.00	33 39 10.11101	117 53 00.89089	2185054.38	6064559.97	

References: OCS SURVEY FILE # P93-1N

Description:

FD PUNCHED CUT-SPIKE AND 1 1/4" OCS BRASS TAG, STAMPED "GPS P272", FLUSH IN ASPHALT. LOCATED IN A S'LY DIRECTION FROM THE INTER OF MESA DR. AND IRVINE AVE.; SET INSIDE UPPER NEWPORT BAY ECOLOGICAL PRESERVE, IN AN ASPHALT BIKE TRAIL EAST OF A BRIDGE OVER SANTA ANA DELHI CHANNEL.

