

HORIZONTAL CONTROL DATA SHEET CCS83, ZONE VI



GPS #: R102

Date Destroyed:

Date Revised:

Benchmark Designation:

OCS Index Map: 4LB
Page/Grid: 826/G-2

City / Location: Seal Beach


 Scale Factor:
 0.99998151

 Ellipsoid Red. Factor:
 1.00000530

 Combination Factor:
 0.99998685

 Convergence Angle:
 -01 00 43.90674

Factors and Convergance Angle based on the 1991.35 Epoch Adjustment positions.

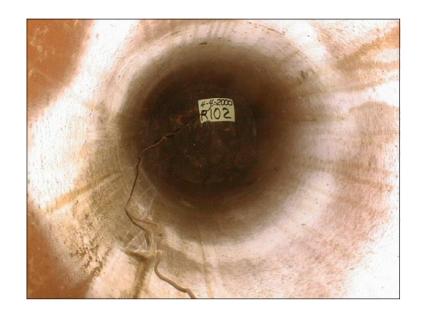

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 45 30.50631	118 05 31.10135	2224556.016	6001830.784	-110.416
2007.00	33 45 30.52271	118 05 31.11857	2224557.70	6001829.36	

References: RS 92-1117

Description:

FD 6" CONC. POST WITH 5" IRON CAP WITH RAISED NUMBER '2' AND BORDER, DOWN 3.8'. LOCATED WEST FROM THE INTER OF WESTMINSTER AVE. AND SEAL BEACH BLVD.; SET ALONG THE W'LY LEVEE, AT THE APPARENT POINT OF INTER OF A CURVE, IN A 5' HIGH BLOCK WALL.

