

## HORIZONTAL CONTROL DATA SHEET CCS83, ZONE VI



**GPS #:** R533

**Date Destroyed:** 

**Date Revised:** 

**Benchmark Designation:** 

OCS Index Map: 6LC

Page/Grid: 772/D-7

City / Location: Unin., Orange County

Scale Factor: 0.99998933


Ellipsoid Red. Factor: 0.99990258

Combination Factor: 0.99989192

Convergence Angle: -00 46 08.04414

Factors and Convergance Angle based on

the 1991.35 Epoch Adjustment positions.

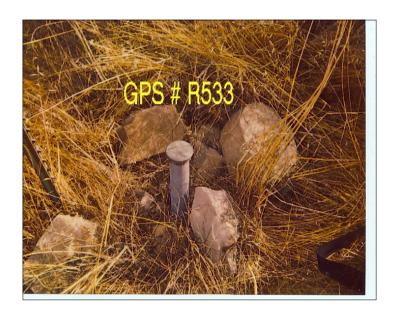

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 48 55.07630	117 38 57.22584	2243141.211	6136663.101	2037.752
2007.00	33 48 55.09282	117 38 57.24236	2243142.90	6136661.73	

References: RS 92-1119

## **Description:**

"N 1/4, SEC 19, T4S, R7W" - FD 2" I.P. WITH 3 1/4" U.S. **DEPARTMENT OF AGRICULTURE & FOREST** SERVICE BRASS CAP STAMPED " SC 18 1/4 T4S R7W RCE 25157 1976", PIPE IS UP 1.1' AND IS **SURROUNDED WITH A ROCK MOUND - LOCATED** FROM THE INTER OF BLACK STAR CANYON RD. AND SILVERADO CANYON RD., PROCEED N'LY ALONG BLACK STAR CANYON RD. 1.1 MILES TO A LOCKED IRON GATE (U.S. FOREST KEY), PROCEED THRU **GATE ALONG SAID RD. 0.5 MILE TO A SHARP RIGHT** TURN INTO BLACK STAR CANYON. CONTINUE RIGHT AND E'LY ALONG SAID RD. 5.4 MILES AND STOP. HIKE UPHILL TO THE EAST AND FOLLOW OLD FIRE BREAK 700'+/- TO A BARB WIRE FENCE. CROSS FENCE AND WALK DOWNHILL, WEST, 150'+/- TO SAID STATION IN THE CLEVELAND NATIONAL FOREST.

