

## HORIZONTAL CONTROL DATA SHEET CCS83, ZONE VI



GPS #: R534

**Date Destroyed:** 

**Date Revised:** 

**Benchmark Designation:** 


OCS Index Map: 6LC

Page/Grid: 772/B-7

City / Location: Unin., Orange County

Scale Factor: 0.99998935
Ellipsoid Red. Factor: 0.99989132
Combination Factor: 0.99988067
Convergence Angle: -00 46 33.37705

Factors and Convergance Angle based on the 1991.35 Epoch Adjustment positions.

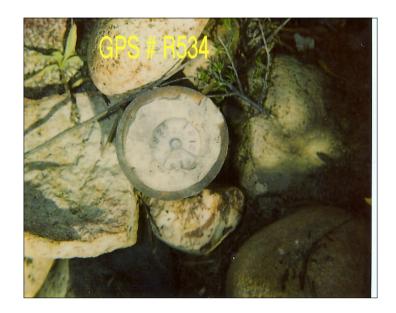

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 48 55.50622	117 39 43.32612	2243237.102	6132774.328	2273.083
2007.00	33 48 55.52273	117 39 43.34261	2243238.79	6132772.96	

References: RS 92-1119

## **Description:**

"NW COR, SEC 19, T4S, R7W" - FD 2 1/4" I.P. WITH 1 1/8" ALUM TAG STAMPED "S18 S24 S19 LS 2348 **BONE" UP 0.4' LOCATED BY 2' DIA. PILE OF ROCKS** WITH A FOREST SERVICE MARKER 1.5' SW'LY OF STATION - LOCATED FROM THE INTER OF SILVERADO CYN RD. AND BLACKSTAR CYN RD., GO N'LY ALONG BLACK STAR CYN RD. 1.1 MILES TO AN IRON GATE (US FORESTRY LOCK), CONT. THRU GATE 0.55 MILE TO A SHARP RIGHT INTO THE CYN. CONT. ALONG RD. EAST 0.9 MILE TO A LOCKED GATE ON THE LEFT (SCE KEY), PROCEED THRU **GATE AND UPHILL ALONG DIRT RD. 0.95 MILE TO** FORK IN THE RD., GO RIGHT ON LOWER RD. AND PROCEED 0.3 MILE TO ANOTHER FORK, BEAR LEFT AND GO 0.75 MILE TO A "T" IN THE RD., TAKE THE UPPER RD. AND GO 0.35 MILE TO "T", TURN RIGHT AND GO 0.45 MILE TO A TRIPLE FORK, TAKE THE MIDDLE RD. AND GO 0.05 MILE TO A GATE, PARK HERE. HIKE APPROX. 60 MINUTES IN A NE'LY **DIRECTION ALONG THE FIREBREAK TRAIL AND RIDGELINE PAST STATION "BLACK" AND CONT. 0.75** MILE ALONG RIDGE AND DOWN IN RAVINE TO SAID STATION, IN THE CLEVELAND NATIONAL FOREST

