

GPS #: **R541**

Date Destroyed:

Date Revised:

Benchmark Designation:

OCS Index Map: 6LC

Page/Grid: 802/B-4

City / Location: Unin., Orange County


Scale Factor: 0.99998526

Ellipsoid Red. Factor: 0.99995103

Combination Factor: 0.99993630

Convergence Angle: -00 46 33.47287

Factors and Convergence Angle based on the 1991.35 Epoch Adjustment positions.

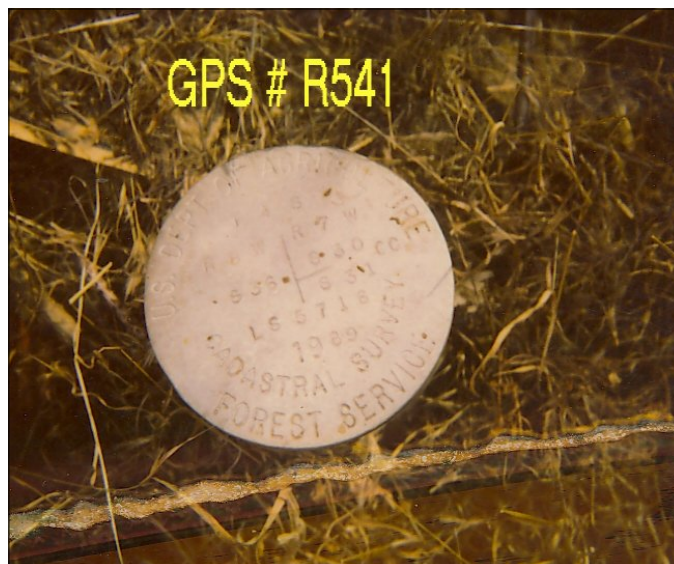

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 47 11.85588	117 39 43.50049	2232760.898	6132617.725	1025.201
2007.00	33 47 11.87243	117 39 43.51671	2232762.59	6132616.38	

References: RS 92-1119

Description:

"NW COR SEC 31, T4S, R8W" - FD 2" I.P. WITH 3 1/2" ALUMINUM U.S. DEPARTMENT OF AGRICULTURE & FOREST SERVICE CAP STAMPED "T4S R8W R7W S36 S30 S31 CC LS 5716 1989" UP 0.3' WITH WITNESS PADDLE 4'+/- N'LY - LOCATED FROM THE INTER OF BLACK STAR CANYON RD. AND SILVERADO CANYON RD., PROCEED N'LY ALONG BLACK STAR CANYON RD. 1.1 MILES TO A LOCKED IRON GATE (U.S. FOREST KEY), PROCEED THRU GATE ALONG SAID RD. 0.5 MILE TO A SHARP RIGHT TURN INTO BLACK STAR CANYON, CONTINUE RIGHT AND E'LY ALONG SAID RD. 2.15 MILES. PARK AT U.S. FOREST SERVICE BOUNDARY MARKER AND HIKE DOWNHILL 100'+/- TO SAID STATION.

