

GPS #: R555

Date Destroyed:

Date Revised:

Benchmark Designation:

OCS Index Map: 1L

Page/Grid: 742/A-6

City / Location: Unin., Orange County


Scale Factor: 0.99999763

Ellipsoid Red. Factor: 0.99998205

Combination Factor: 0.99997969

Convergence Angle: -00 46 53.68827

Factors and Convergence Angle based on the 1991.35 Epoch Adjustment positions.

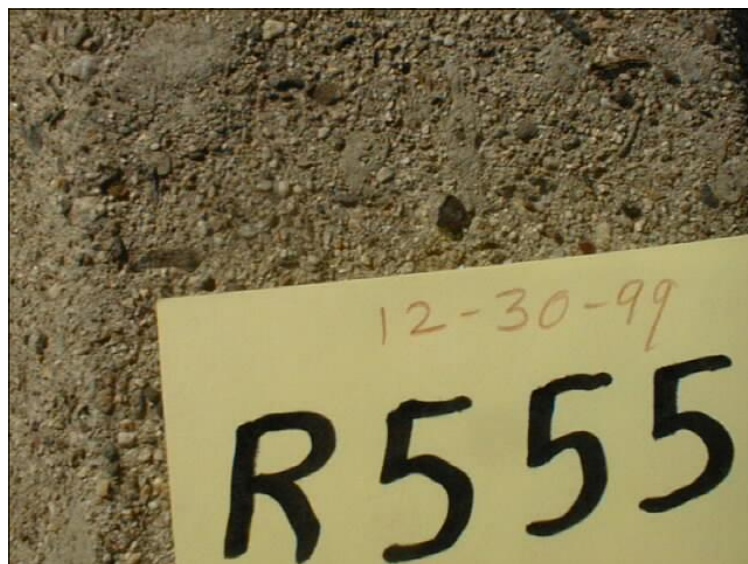

Epoch Adjustment	Latitude	Longitude	Northing (ft)	Easting (ft)	Ellipsoid Height (ft)
1991.35	33 52 08.26939	117 40 20.28803	2262763.148	6129921.753	376.463
2007.00	33 52 08.28603	117 40 20.30435	2262764.85	6129920.40	

References: RS 92-1119

Description:

FD 4" X 4" CONC. POST WITH BRASS NAIL IN CENTER, UP 0.35'. LOCATED EAST OF THE INTER OF THE 91 FREEWAY AND COAL CANYON RD.; SET APPROX. 70' SOUTH OF THE SOUTH EDGE OF 91 FREEWAY, ON THE COUNTY LINE BETWEEN ORANGE AND RIVERSIDE COUNTIES.

