

**Designation: 1M-18-04**

Date Destroyed:

Date Revised: 4/11/2004

GPS #:

OCS Index Map: Q05-08


Page/Grid: 767/H-5

City / Location: Anaheim

Line #/SSN: 163/0180

Established By: OCS 2004

Monument Type: Orange County Surveyor's 3 3/4"  
Aluminum Disk

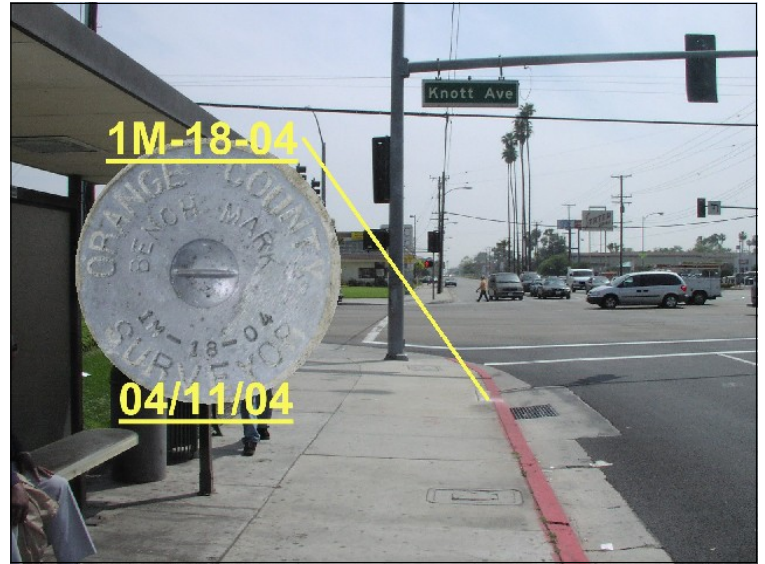

NAVD88 (ft)	NGVD29 (ft)	Year Leveled
64.260	61.839	2005
64.370	61.905	2004

For Reconnaissance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 49 55.25	118 00 40.46

**Description:**

DESCRIBED BY OCS 2004 - FOUND 3 3/4" OCS ALUMINUM BENCHMARK DISK STAMPED "1M-18-04", SET IN THE NORTHWESTERLY CORNER OF A 1 FT. BY 4 FT. CONCRETE CATCH BASIN. MONUMENT IS LOCATED IN THE NORTHWESTERLY CORNER OF THE INTERSECTION OF KNOTT AVENUE AND LINCOLN AVENUE, 81 FT. WESTERLY OF THE CENTERLINE OF KNOTT AND 27 FT. NORTHERLY OF THE CENTERLINE OF LINCOLN. MONUMENT IS SET LEVEL WITH THE SIDEWALK.

