

Designation: 2F-22-86

Date Destroyed:

Date Revised: 5/10/2004

GPS #:

OCS Index Map: Q06-07


Page/Grid: 768/H-5

City / Location: Anaheim

Line #/SSN: 405/0010

Established By: OCS 1986

Monument Type: Orange County Surveyor's 3 3/4"
Aluminum Disk

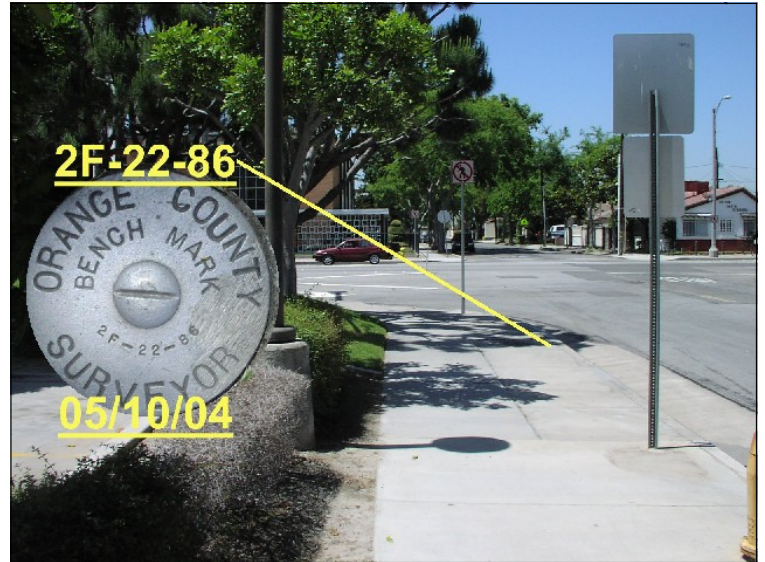

NAVD88 (ft)	NGVD29 (ft)	Year Leveled
153.098	150.680	2005
153.159	150.719	1990

For Reconnaissance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 50 11.03	117 55 11.88

Description:

DESCRIBED BY OCS 2004 - FOUND 3 3/4" OCS ALUMINUM BENCHMARK DISK STAMPED "2F-22-86", SET IN THE NORTHWESTERLY CORNER OF A 4 FT. BY 20FT. CONCRETE CATCH BASIN. MONUMENT IS LOCATED IN THE SOUTHEASTERLY CORNER OF THE INTERSECTION OF HARBOR BOULEVARD AND CYPRESS STREET, 20 FT. SOUTHERLY OF THE CENTERLINE OF CYPRESS STREET AND 78 FT. EASTERLY OF THE CENTERLINE OF HARBOR BOULEVARD. MONUMENT IS SET LEVEL WITH THE SIDEWALK

