

Designation: 3F-113-82

Date Destroyed:

Date Revised:

GPS #:

OCS Index Map: Q12-11


Page/Grid: 860/E-6

City / Location: Irvine

Line #/SSN: 356/0300

Established By: OCS 1982

Monument Type: Orange County Surveyor's 3 3/4"
Aluminum Disk

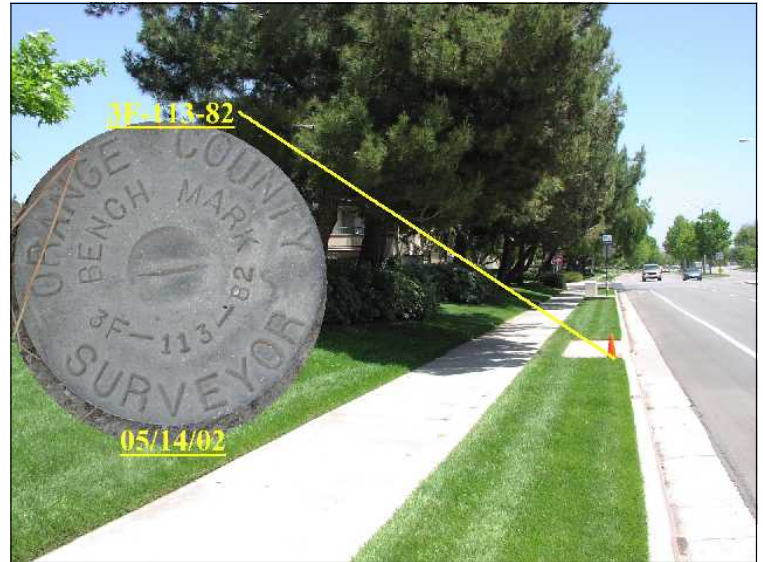

NAVD88 (ft)	NGVD29 (ft)	Year Leveled
101.065	98.673	2003
101.065	98.673	1991

For Reconnaissance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 40 20.92	117 47 47.33

Description:

DESCRIBED BY OCS 2002 - FOUND 3 3/4" OCS ALUMINUM BENCHMARK DISK STAMPED "3F-113-82", SET IN THE SOUTHWESTERLY CORNER OF A 4.5 FT. BY 15 FT. CONCRETE CATCH BASIN. MONUMENT IS LOCATED ALONG THE NORTHEASTERLY SIDE OF ALTON PARKWAY, 29 FT. NORTHERLY OF THE CENTERLINE OF ALTON AND 0.5 MILES NORTHWESTERLY ALONG ALTON FROM THE CENTERLINE OF JEFFREY ROAD. MONUMENT IS SET LEVEL WITH THE SIDEWALK.

