

**Designation: C-352-R65**

Date Destroyed:

Date Revised:

GPS #:

OCS Index Map: Q02-12


Page/Grid: 709/B-6

City / Location: Brea

Line #/SSN: 253/0220

Established By: USC & GS 1965

Monument Type: Bronze / Brass Disk

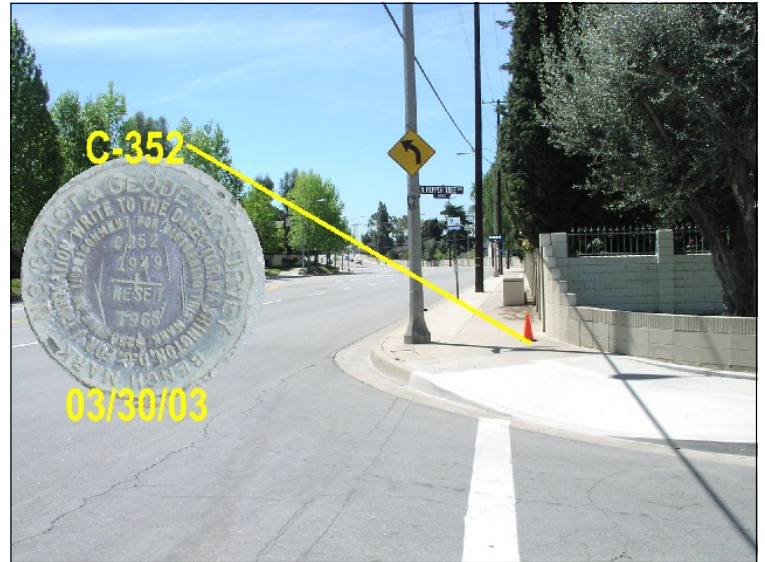

NAVD88 (ft)	NGVD29 (ft)	Year Leveled
375.252	372.835	2005
375.351	372.935	1990

For Reconnaissance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 55 43.53	117 53 43.34

**Description:**

DESCRIBED BY OCS 2003 - FOUND 3 3/4" US COAST AND GEODETIC SURVEY BRONZED DISK STAMPED "C-352-R65", SET IN THE TOP OF A CONCRETE SIDEWALK. MONUMENT IS LOCATED IN THE SOUTHWESTERLY CORNER OF THE INTERSECTION OF NORTH PEPPERTREE DRIVE AND BREA BOULEVARD, 51 FT. SOUTHERLY OF THE CENTERLINE OF PEPPERTREE, 48 FT. WESTERLY OF THE CENTERLINE OF BREA AND 5.5 FT. WESTERLY OF A CONCRETE SINGLE LIGHT POLE. MONUMENT IS SET LEVEL WITH THE SIDEWALK.

