

**Designation: F-785**

Date Destroyed:

Date Revised:

GPS #:

OCS Index Map: Q20-03


Page/Grid: 972/C-3

City / Location: San Juan Capistrano

Line #/SSN: 402/0070

Established By: USC & GS 1946

Monument Type: Bronze / Brass Disk

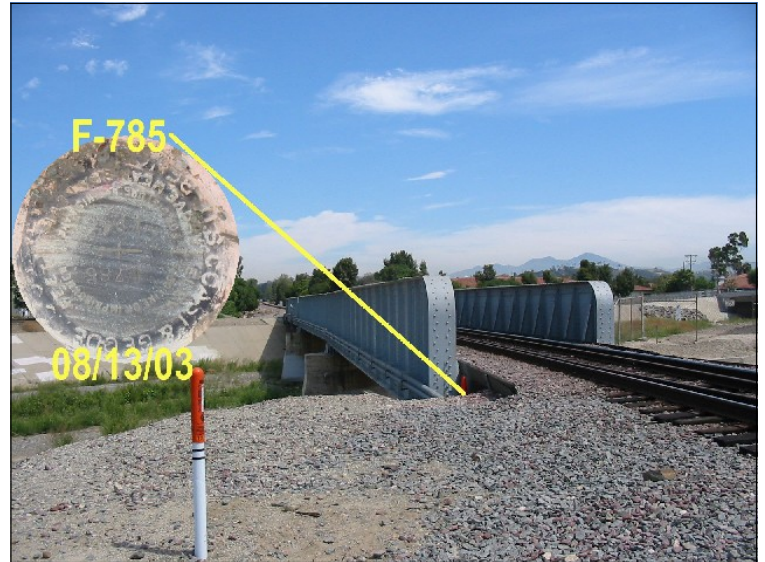

NAVD88 (ft)	NGVD29 (ft)	Year Leveled
75.717	73.413	1991

For Reconnaissance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 29 27.05	117 39 51.49

**Description:**

DESCRIBED BY OCS 2003 - FOUND 3 3/4" US COAST AND GEODETIC SURVEY BRONZED DISK STAMPED "F 785 1946", SET IN THE TOP OF A CONCRETE BRIDGE ABUTMENT. MONUMENT IS LOCATED IN THE SOUTHWESTERLY CORNER OF THE ATCHINSON\TOPEKA AND SANTA FE RAILWAY OVERCROSSING OF SAN MATEO CREEK, 69 FT. NORTHERLY ALONG THE RAILWAY FROM THE CENTERLINE OF THE INTERSTATE 5 FREEWAY SOUTHBOUND ONRAMP AT CAMINO CAPISTRANO PROLONGED TO THE WEST AND 150 +/- WESTERLY FROM THE CENTERLINE OF CAMINO CAPISTRANO. MONUMENT IS SET 2.0 FT. BELOW THE TRACKS.

