

Designation: RS-11A-R69

Date Destroyed:

Date Revised:

GPS #:

OCS Index Map: Q02-11


Page/Grid: 708/J-5

City / Location: Brea

Line #/SSN: 401/0470

Established By: USGS 1969

Monument Type: Bronze / Brass Disk

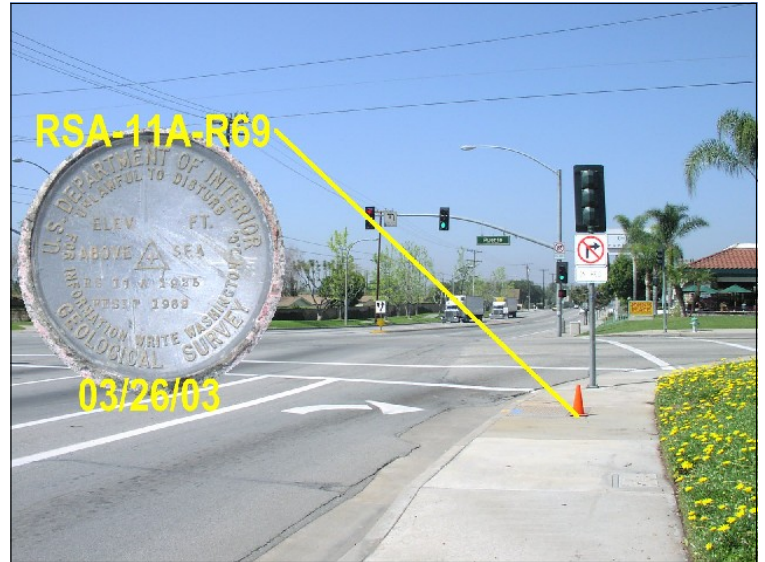

| NAVD88 (ft) | NGVD29 (ft) | Year Leveled |
|-------------|-------------|--------------|
| 393.772 | 391.355 | 2005 |
| 393.859 | 391.444 | 1990 |
| | | |
| | | |

| For Reconnaissance Only! | |
|--------------------------|---------------------|
| Latitude (30' +/-) | Longitude (30' +/-) |
| 33 55 55.23 | 117 54 55.53 |

Description:

DESCRIBED BY OCS 2003 - FOUND 3 3/4" DEPARTMENT OF THE INTERIOR ALUMINUM BENCHMARK DISK STAMPED "RS 11A 1925 RESET 1969 R69", SET IN THE NORTHEASTERLY CORNER OF A 4.5 FT. BY 5 FT. CONCRETE CATCH BASIN. MONUMENT IS LOCATED IN THE NORTHEASTERLY CORNER OF THE INTERSECTION OF PUENTE STREET AND CENTRAL AVENUE, 46 FT. NORTHERLY OF THE CENTERLINE OF CENTRAL AND 63 FT. EASTERLY OF THE CENTERLINE OF PUENTE. MONUMENT IS SET LEVEL WITH THE SIDEWALK.

