

**Designation: TRI-CO**

Date Destroyed:

Date Revised:

GPS #: 4466

OCS Index Map: Q08-03


Page/Grid: 742/A-6

City / Location: Unin., Orange Co.

Line #/SSN: 403/0930

Established By: OCS 1975

Monument Type: Copper Tag

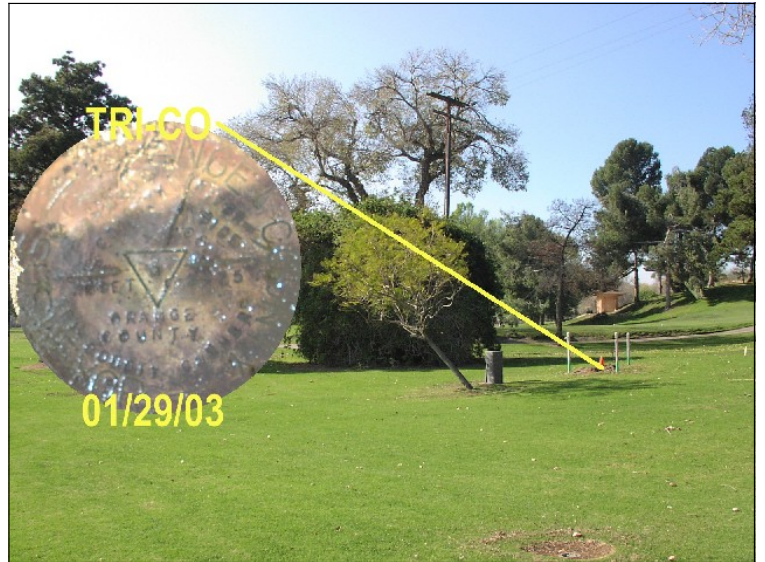

NAVD88 (ft)	NGVD29 (ft)	Year Leveled
420.431	418.029	1988

For Reconnaissance Only!	
Latitude (30' +/-)	Longitude (30' +/-)
33 52 15.63496	117 40 23.29953

**Description:**

DESCRIBED BY OCS 2003 - FOUND 3 3/4" OCS ALUMINUM BENCHMARK DISK STAMPED "TRI-CO", SET IN THE TOP OF A 1 FT. DIAMETER CONCRETE POST. MONUMENT IS LOCATED ALONG THE NORTHERLY SIDE OF THE FAIRWAY FOR THE SANTA ANA GOLF COURSE HOLE #1, FROM THE INTERSECTION OF GREENRIVER AND CRESTRIDGE DRIVE PROCEED WESTERLY ALONG GREENRIVER 1 MILE TO THE BRIDGE CROSSING THE SANTA ANA RIVER PROCEED ACROSS SAID BRIDGE AND ENTER GATE FOR GOLF COURSE, PROCEED NORTHWESTERLY ACROSS HOLE #1 290+/- FT. TO THREE WHITE MARKER PIPES FORMING A TRIANGLE SHAPE AROUND BENCHMARK. MONUMENT IS DOWN 0.6 FT. BELOW THE SURFACE OF THE GROUND.

